

Digital Input LB1108A


- 8-channel
- Inputs Ex ia
- Mounting in Zone 2, Class I/Div.2 or in the safe area
- Dry contact or NAMUR inputs
- Positive or negative logic selectable
- Simulation mode for service operations (forcing)
- Line fault detection (LFD)
- Permanently self-monitoring
- Module can be exchanged under voltage



Function

The device accepts digital input signals of NAMUR sensors or mechanical contacts from the hazardous area. Open or short circuit line fault alarms are detected. The inputs are galvanically isolated from the bus and the power supply (EN 60079-11).

Connection

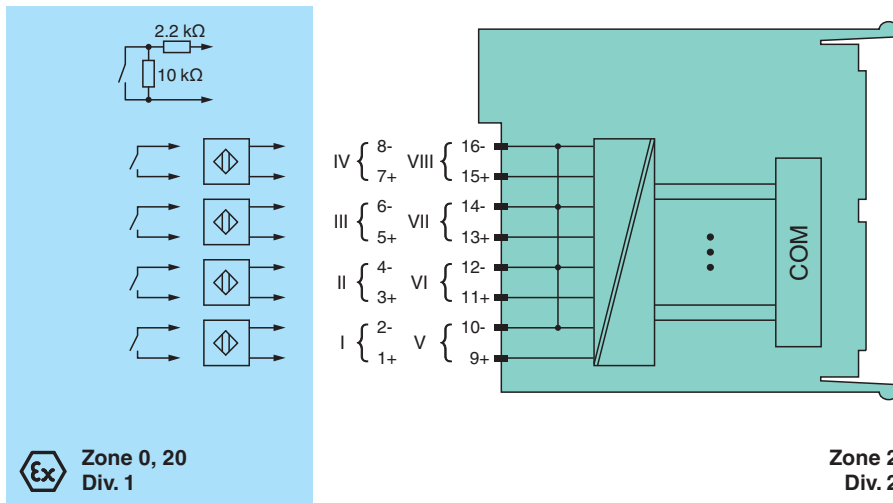

Technical Data

Slots	
Occupied slots	2
Supply	
Connection	backplane bus
Rated voltage	U _r 12 V DC , only in connection with the power supplies LB9***
Power dissipation	0.95 W
Power consumption	0.95 W
Internal bus	
Connection	backplane bus
Interface	manufacturer-specific bus to standard com unit
Digital input	
Number of channels	8
Sensor interface	

Release date: 2023-10-19 Date of issue: 2023-10-19 Filename: 254631_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Connection	NAMUR sensor		
Connection [2]	voltage-free contact		
Connection	channel I: 1+, 2-; channel II: 3+, 4-; channel III: 5+, 6-; channel IV: 7+, 8-; channel V: 9+, 10-; channel VI: 11+, 12-; channel VII: 13+, 14-; channel VIII: 15+, 16-		
Rated values	acc. to EN 60947-5-6 (NAMUR)		
Switching point/switching hysteresis	1.2 ... 2.1 mA / ± 0.2 mA		
Voltage	8.2 V		
Internal resistor	R _i	1 kΩ	
Line fault detection	can be switched on/off for each channel via configuration tool		
Connection	mechanical switch with additional resistors (see connection diagram) proximity switches without additional wiring		
Short-circuit	< 360 Ω		
Open-circuit	< 0.35 mA		
Minimum pulse duration	1 ms		
Indicators/settings			
LED indication	Power LED (P) green: supply Status LED (I) red: line fault		
Coding	optional mechanical coding via front socket		
Directive conformity			
Electromagnetic compatibility	Directive 2014/30/EU		
	EN 61326-1:2013		
Conformity			
Electromagnetic compatibility	NE 21		
Degree of protection	IEC 60529		
Environmental test	EN 60068-2-14		
Shock resistance	EN 60068-2-27		
Vibration resistance	EN 60068-2-6		
Damaging gas	EN 60068-2-42		
Relative humidity	EN 60068-2-78		
Ambient conditions			
Ambient temperature	-40 ... 60 °C (-40 ... 140 °F)		
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)		
Relative humidity	95 % non-condensing		
Altitude	max. 2000 m		
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18		
Vibration resistance	frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance		
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3		
Mechanical specifications			
Degree of protection	IP20 when mounted on backplane		
Connection	removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²)		
Mass	approx. 130 g		
Dimensions	32.5 x 100 x 102 mm (1.28 x 3.9 x 4 inch)		
Data for application in connection with hazardous areas			
EU-type examination certificate	PTB 03 ATEX 2042 X		
Marking	Ⓜ II (1)G [Ex ia Ga] IIC Ⓜ II (1)D [Ex ia Da] IIIC Ⓜ I (M1) [Ex ia Ma] I		
Input			
Voltage	U _o	14.9 V	
Current	I _o	15.7 mA	
Power	P _o	58.2 mW (linear characteristic)	


Release date: 2023-10-19 Date of issue: 2023-10-19 Filename: 254631_eng.pdf

Technical Data

Certificate	PF 08 CERT 1234 X
Marking	Ⓜ II 3 G Ex nA IIC T4 Gc
Galvanic isolation	
Input/power supply, internal bus	safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V
Directive conformity	
Directive 2014/34/EU	EN IEC 60079-0:2018+AC:2020 EN 60079-11:2012 EN 60079-15:2010
International approvals	
ATEX approval	PTB 03 ATEX 2042 X
UL approval	E106378
IECEX approval	
IECEX certificate	IECEX BVS 09.0037X
IECEX marking	Ex nA [ia Ga] IIC T4 Gc [Ex ia Da] IIC [Ex ia Ma] I
General information	
System information	The module has to be mounted in appropriate backplanes (LB9***) in Zone 2 or outside hazardous areas. Here, observe the corresponding declaration of conformity. For use in hazardous areas (e. g. Zone 2, Zone 22 or Div. 2) the module must be installed in an appropriate enclosure.
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

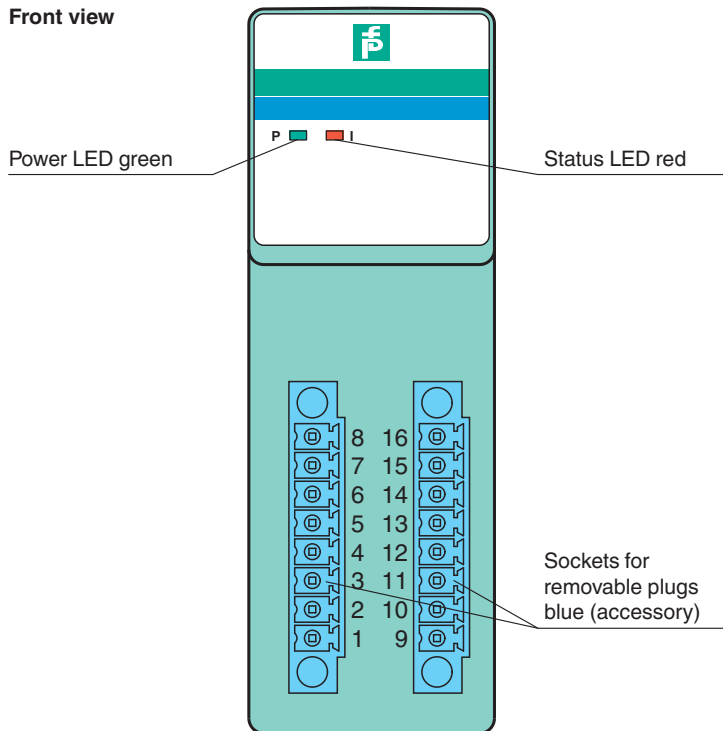

Release date: 2023-10-19 Date of issue: 2023-10-19 Filename: 254631_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com