


Inductive sensor


NJ1,5-6,5-N-Y40232



■ 1.5 mm flush

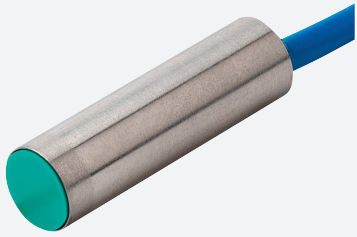

Dimensions



Technical Data

General specifications

Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	s_n	1.5 mm
Installation		flush
Assured operating distance	s_a	0 ... 1.215 mm
Actual operating distance	s_r	1.35 ... 1.65 mm typ.
Reduction factor r_{Al}		0.22
Reduction factor r_{Cu}		0.19
Reduction factor r_{304}		0.65
Output type		2-wire
Nominal ratings		
Nominal voltage	U_o	8 V
Switching frequency	f	0 ... 5000 Hz
Hysteresis	H	1 ... 10 typ. 5 %
Current consumption		
Measuring plate not detected		min. 3 mA

Release date: 2024-01-09 Date of issue: 2024-01-09 Filename: 70133222_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Measuring plate detected	≤ 1 mA	
Compliance with standards and directives		
Standard conformity		
NAMUR	EN 60947-5-6:2000 IEC 60947-5-6:1999	
Standards	EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012	
Approvals and certificates		
IECEX approval		
Equipment protection level Gb	IECEX PTB 11.0037X	
Equipment protection level Da	IECEX PTB 11.0037X	
Equipment protection level Mb	IECEX PTB 11.0037X	
ATEX approval		
Equipment protection level Gb	PTB 00 ATEX 2048 X	
Equipment protection level Da	PTB 00 ATEX 2048 X	
UL approval	cULus Listed, General Purpose	
CML approval	on request	
ANZEx	18.3018X	
Ambient conditions		
Ambient temperature	-25 ... 100 °C (-13 ... 212 °F)	
Mechanical specifications		
Connection type	cable , shielded	
Housing material	Stainless steel 1.4305 / AISI 303	
Sensing face	PBT	
Degree of protection	IP67	
Cable		
Bending radius	> 10 x cable diameter	
Material	PVC	
Core cross section	0.14 mm ²	
Length	L	2 m
Dimensions		
Length	22 mm	
Diameter	6.5 mm	
General information		
Use in the hazardous area	see instruction manuals	

Connection

