


Thru-beam sensor LD28/LV28-F1/47/74/76a



- Universal series with highly versatile fields of use
- Resistant against noise: reliable operation under all conditions
- Highly visible LED as alignment aid in receiver optics
- Emitter with test input
- Version with red light

Universal thru-beam sensor, large housing design, 30 m detection range, red light, 25 kHz transmission frequency, light/dark on, DC version, 2 PNP outputs, test input, pre-fault output, M18 plug

Dimensions

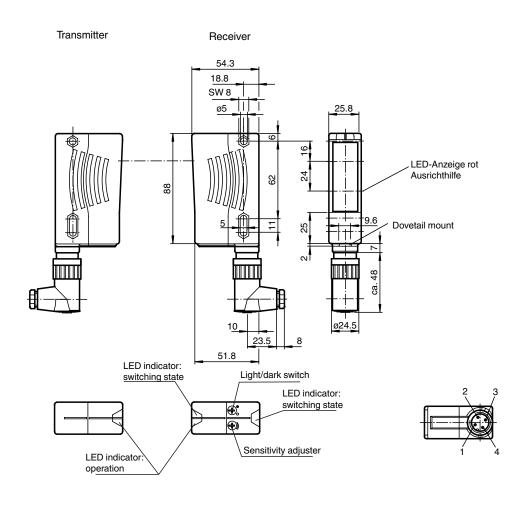

Technical Data

System components		
Emitter		LD28-F1/74/76a
Receiver		LV28-F1/47/74
General specifications		
Effective detection range		0 30 m
Threshold detection range		40 m
Light source		LED
Light type		modulated visible red light, 660 nm
Alignment aid		LED red (in receiver lens) illuminated constantly: beam is interrupted, flashes: reaching switching point, off: sufficient stability control
Transmitter frequency		F1 = 25 kHz
Diameter of the light spot		approx. 0.6 m at 30 m
Angle of divergence		Emitter 1.2°, Receiver 5°
Ambient light limit		50000 Lux
Functional safety related parameters		
MTTF _d		620 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		90 %
Indicators/operating means		
Operation indicator		LED green
Function indicator		LED yellow: 1. LED lit constantly: signal > 2 x switching point (function reserve) 2. LED flashes: signal between 1 x switching point and 2 x switching point 3. LED off: signal < switching point
Control elements		sensitivity adjustment (Adjustment to < 25% of the effective operating range) , Light- on/dark-on changeover switch
Electrical specifications		
Operating voltage	U _B	10 30 V DC
Ripple		10 %
No-load supply current	Ι _Ο	Emitter: ≤ 50 mA Receiver: ≤ 35 mA
Input		
Test input		emitter deactivation at $+U_B$ (I _{max.} < 3 mA at 30 V DC)
Output		
Switching type		light/dark on, switchable
Signal output		2 PNP, complementary, short-circuit protected, reverse polarity protected , open collectors
Switching voltage		max. 30 V DC
Switching current		max. 200 mA
Switching frequency	f	1000 Hz
Response time		0.5 ms
Conformity		
Product standard		EN 60947-5-2
Approvals and certificates		
EAC conformity		TR CU 020/2011
Protection class		II, rated voltage \leq 250 V AC with pollution degree 1-2 according to IEC 60664-1
UL approval		cULus Listed , Class 2 power source
CCC approval		CCC approval / marking not required for products rated \leq 36 V
Ambient conditions		
Ambient temperature		-40 60 °C (-40 140 °F)
Storage temperature		-40 75 °C (-40 167 °F)
Mechanical specifications		
Housing width		25.8 mm
Housing height		88 mm

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
USA: +1 330 486 0001
General General

Release date: 2021-11-11 Date of issue: 2021-11-11 Filename: 116632_eng.pdf

Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com


Thru-beam sensor

LD28/LV28-F1/47/74/76a

Technical Data

Housing depth	54.3 mm
Degree of protection	IP67
Connection	4-pin, M18 plastic connector
Material	
Housing	Plastic ABS
Optical face	Plastic pane
Mass	140 g (emitter and receiver)


Connection Assignment

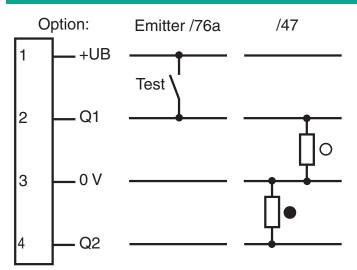

O = Light on

= Dark on


Characteristic Curve

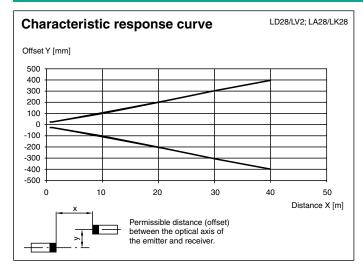


Release date: 2021-11-11 Date of issue: 2021-11-11 Filename: 116632_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

3

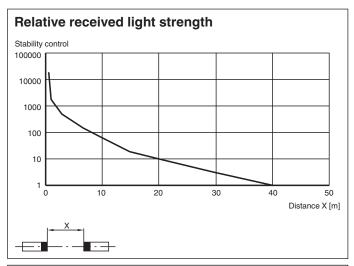

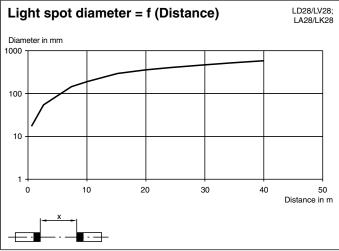

Accessories

C a	ОМН-05	Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm
	OMH-21	Mounting bracket: mounting aid for sensors in the RL* series
	OMH-22	Mounting aid for RL* series
	OMH-RLK29-HW	Mounting bracket for rear wall mounting
Ũ	OMH-RL28-C	Weld slag cover model

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

4