



Retroreflective sensor RLK91-6-IR/25/31/115



- Retroreflective sensor for single-beam closing edge protection
- Narrow housing suitable for small gaps
- Sturdy plastic housing
- Various possibilities for mounting
- Version with infrared light
- AC version

Mid-range photoelectric sensors for detecting people, objects, and vehicles











Function

Concentration on the essentials is the hallmark of the 91 series. As AC sensor, these economical, reliable and easy-to-use photoelectric sensors can be used almost universally. Their narrow design means that they can be used in any environment The single-beam photoelectric sensors of the 91 series are suitable for closing-edge monitoring for elevators, barriers and doors, as well as for object detection and object tracking in material handling systems.

Dimensions

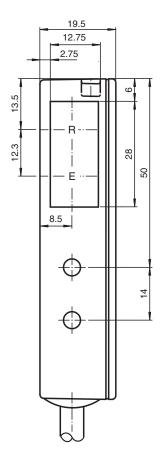

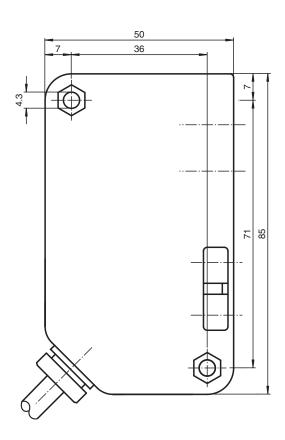


Technical Data

General specifications		
Effective detection range		0 6 m
Reflector distance		0 6 m
Threshold detection range		9 m
Reference target		H85-2 reflector
Light source		LED
Light type		modulated infrared light
Diameter of the light spot		approx. 230 mm at a distance of 6000 mm
Angle of divergence		approx. 2.5 °
Ambient light limit		90000 Lux
Functional safety related parameters		
MTTF _d		1083.4 a
Indicators/operating means		
Function indicator		LED red, flashes when falling short of the stability control
Electrical specifications		
Rated operating voltage	U_e	96 240 V AC
Power consumption	P ₀	12 VA
Contact ratings		according to UL 508 1/8 HP, 1.9 FLA, 240 V AC, Pilot Duty Code D150 6,000 1.5 FLA, 120 V AC, Pilot Duty 30,000 0.8 FLA, 240 V AC, Pilot Duty 30,000
Output		
Switching type		light-on


Technical Data		
Signal output		Weak current relay, 1 alternator
Switching voltage		max. 240 V AC
Switching current		2.5 A / 240 V AC
Switching power		max. 120 W / 600 VA
Switching frequency	f	25 Hz
Response time		20 ms
Conformity		
Product standard		EN 60947-5-2
Approvals and certificates		
EAC conformity		TR CU 020/2011 TR CU 004/2011
UL approval		cULus Listed For overcurrent protection, install a fuse with a rated current of max. 5 A and min. 240 V AC
CCC approval		Certified by China Compulsory Certification (CCC)
Ambient conditions		
Ambient temperature		-20 55 °C (-4 131 °F)
Storage temperature		-20 75 °C (-4 167 °F)
Mechanical specifications		
Degree of protection		IP65
Connection		5 m fixed cable
Material		
Housing		Luran®
Optical face		Luran®
Mass		100 g

Connection Assignment

Option:





Assembly

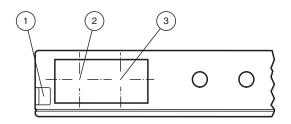

- Functional display red
- Optical axis Receiver
- 3 Optical axis Transmitter

Characteristic Curve

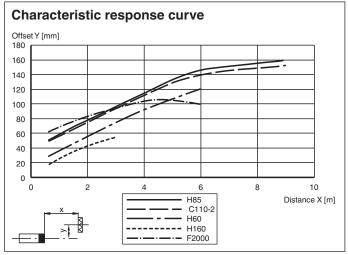

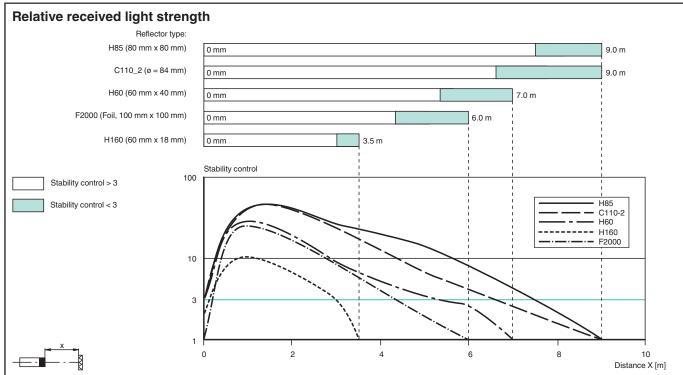

Application



Accessories OMH-91 Mounting bracket REF-H50 Reflector, rectangular 51 mm x 61 mm, mounting holes, fixing strap REF-H60-2 Reflector with mounting holes REF-H85-2 Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes REF-H160 Reflector, rectangular 60 mm x 18 mm, mounting holes REF-H180 Reflector, rectangular 182 mm x 42 mm, mounting holes REF-C110-2 Reflector, round ø 84 mm, central mounting hole OFR-100/100 Reflective tape 100 mm x 100 mm **Reflector Weather Cap** Weather hood for series reflector

USA: +1 330 486 0001

fa-info@us.pepperl-fuchs.com

Pepperl+Fuchs Group www.pepperl-fuchs.com The retro-reflective sensor contains both an emitter and a receiver in a single housing. A reflector reflects the light from emitter back to the receiver. If an object interrupts the light beam, the switching function is initiated.

Application

- Closing-edge monitoring for elevators, barriers and industrial doors
- · Detecting and tracking objects in material handling