

SMART Current Driver KCD2-SCD-Ex1

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current output up to 650 Ω load
- HART-IP and valve positioner
- Lead breakage monitoring
- Housing width 12.5 mm
- Up to SIL 2 (SC 3) acc. to IEC/EN 61508



SIL 2



Function

This isolated barrier is used for intrinsic safety applications.

The device repeats the input signal from a control system to drive SMART I/P converters, electrical valves, and positioners located in a hazardous area.


Digital signals are superimposed on the analog values at the field side or control side and are transferred bi-directionally.

The current is transferred via a DC/DC converter and repeated at the output terminals.

An open field circuit presents a high impedance to the control side to allow alarm conditions to be monitored by the control system.

Test sockets for the connection of HART communicators are integrated into the terminals of the device.

Wiring Diagram

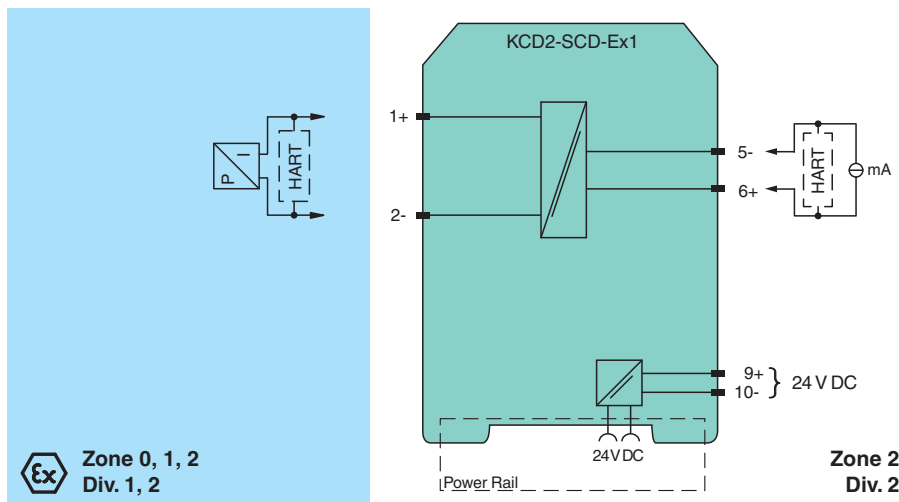

Technical Data

General specifications

Signal type	Analog output
-------------	---------------

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 2
Systematic capability (SC)	SC 3

Supply

Connection	Power Rail or terminals 9+, 10-
------------	---------------------------------

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Rated voltage	U_r	19 ... 30 V DC
Ripple		$\leq 10 \%$
Rated current	I_r	$\leq 30 \text{ mA}$ at 24 V
Power dissipation		$\leq 600 \text{ mW}$ at 20 mA and 500 Ω load
Power consumption		$\leq 700 \text{ mW}$
Input		
Connection side		control side
Connection		terminals 5-, 6+
Input signal		4 ... 20 mA, limited to approx. 26 mA
Input voltage		open loop voltage of the control system < 30 V
Voltage drop		approx. 6 V at 20 mA
Input resistance		> 100 k Ω , with field wiring open
Output		
Connection side		field side
Connection		terminals 1+, 2-
Voltage		$\geq 13 \text{ V}$ at 20 mA
Current		4 ... 20 mA
Load		0 ... 650 Ω
Ripple		20 mV _{rms}
Transfer characteristics		
Deviation		at 20 °C (68 °F), 4 ... 20 mA < 0.1 % of full scale, incl. non-linearity and hysteresis
Influence of ambient temperature		< 2 $\mu\text{A/K}$ (-20 ... 70 °C (-4 ... 158 °F)); < 4 $\mu\text{A/K}$ (-40 ... -20 °C (-40 ... -4 °F))
Frequency range		field side into the control side: bandwidth with 0.5 V _{pp} signal 0 ... 3 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V _{pp} signal 0 ... 3 kHz (-3 dB)
Rise time		10 to 90 % $\leq 10 \text{ ms}$
Galvanic isolation		
Input/Output		basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Input/power supply		basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Output/power supply		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Indicators/settings		
Display elements		LED
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2017 EN 61326-3-2:2018
Degree of protection		IEC 60529
Protection against electrical shock		UL 61010-1:2019
Ambient conditions		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		12.5 x 124 x 114 mm (0.5 x 4.9 x 4.5 inch) (W x H x D), housing type A2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		CESI 06 ATEX 021 X
Marking		Ⓔ II (1)G [Ex ia Ga] IIC Ⓔ II (1)D [Ex ia Da] IIIC Ⓔ I (M1) [Ex ia Ma] I
Output		Ex ia

Release date: 2026-07-22 Date of issue: 2026-07-22 Filename: 70150440_eng.pdf

Technical Data

Supply		
Maximum safe voltage	U _m	250 V AC (Attention! U _m is no rated voltage.)
Equipment		terminals 1+, 2-
Voltage	U _o	25.2 V
Current	I _o	100 mA
Power	P _o	630 mW
Internal capacitance	C _i	5.7 nF
Internal inductance	L _i	negligible
Certificate		CESI 19 ATEX 021 X
Marking		Ⓔ II 3G Ex ec IIC T4 Gc
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Output/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 , EN IEC 60079-11:2024 , EN IEC 60079-7:2015+A1:2018
International approvals		
FM approval		
FM certificate		FM 18 CA 0116 X , FM 19 US 0117 X
Control drawing		116-0469 (cFMus)
UL approval		E106378
Control drawing		116-0459 (cULus)
IECEx approval		
IECEx certificate		IECEx CES 06.0001X
IECEx marking		[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

