

# Background suppression sensor RLK28-8-H-2000-IR-Z/31/116




- Universal series with highly versatile fields of use
- Resistant against noise: reliable operation under all conditions
  Minimal black-white difference through the infrared transmission LED
- Programmable time function GAN, GAB, IAB and GAN-IAB as double function
- Version for universal voltages

#### Background suppression sensor



## Dimensions

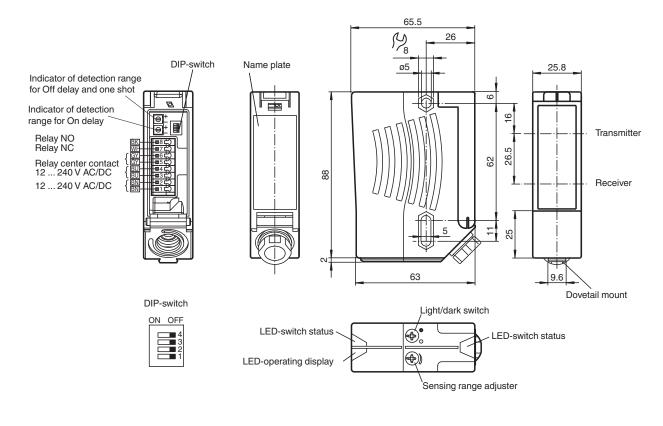

## **Technical Data**


General specifications		
Detection range		20 2000 mm
Detection range min.		20 200 mm
Detection range max.		20 2000 mm
Adjustment range		200 2000 mm
Background suppression		max. + 10 % of the upper limit of the detection range
Light source		IRED
Light type		modulated infrared light , 880 nm
Black-white difference (6 %/90 %)		< 40 %
Diameter of the light spot		approx. 70 mm at a distance of 2000 mm
Opening angle		transmitter 2° receiver 2°
Ambient light limit		50000 Lux
Functional safety related parameters		
MTTF <sub>d</sub>		620 a
Mission Time (T <sub>M</sub> )		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Function indicator		2 LEDs yellow ON: object inside the scanning range OFF: object outside the scanning range
Control elements		Sensing range adjuster, Light-on/dark-on changeover switch
Electrical specifications		
Operating voltage	$U_B$	12 240 V AC/DC
Power consumption	P <sub>0</sub>	≤ 3.5 VA
Output		
Switching type		light/dark on, switchable (selectable, light/dark switching is only activated if the receiver has 'dark on' selected.)
Signal output		Relay, 1 alternator
Switching voltage		max. 250 V AC/DC
Switching current		max. 2 A
Switching power		DC: max. 50 W AC: max. 500 VA
Switching frequency	f	25 Hz
Response time		20 ms
Timer function		ON delay (GAN), OFF delay (GAB), one shot (IAB), ON delay-one shot (GAN-IAB), ON delay-OFF delay (GAN-GAB), programmable adjustment interval 0.1 10 s
Conformity		
Product standard		EN 60947-5-2
Approvals and certificates		
Protection class		II, rated insulation voltage $\leq$ 250 V AC with pollution degree 1-2 according to IEC 60664-1 Output circuit insulated from control circuit in accordance with IEC 61140. Caution! The protection class 2 is only valid when the terminal compartment is closed.
UL approval		E87056, cULus Listed <b>Caution:</b> This equipment is considered as open-type equipment. It must be mounted within an enclosure, that is suitably designed for protection against internal fire and personal injury resulting from accessibility to live parts according UL 508.
CCC approval		Certified by China Compulsory Certification (CCC)
Ambient conditions		
Ambient temperature		-40 60 °C (-40 140 °F)
		-40 60 °C (-40 140 °F)
Storage temperature		
5		
Storage temperature Mechanical specifications Housing width		25.8 mm
Mechanical specifications		25.8 mm 88 mm

Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com


Technical Data	
Degree of protection	IP67
Connection	terminal compartment with 8 spring-loaded terminals for wire cross section 0.5 1.5 mm², insulation stripping 7.5 8.5 mm, M16 x 1.5 cable gland
Material	
Housing	Plastic ABS
Optical face	Plastic pane
Mass	112 g

# **Connection Assignment**

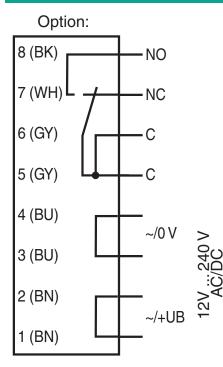

The relay-functions "NC" and "NO" bear on the switching mode "Light-ON". This complies to the default setting of the light/dark switch, located on top of the housing (factory setting).

## **Characteristic Curve**

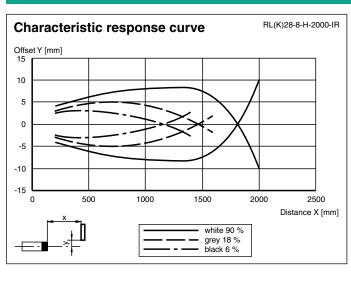


Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Pepperl+Fuchs Group www.pepperl-fuchs.com

3

### **Characteristic Curve**

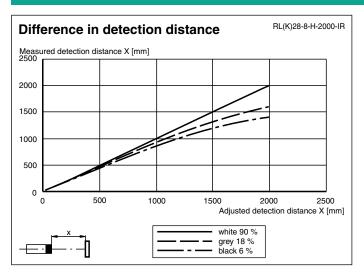

### Accessories

OMH-05	Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm	
OMH-21	Mounting bracket: mounting aid for sensors in the RL* series	
 ОМН-22	Mounting aid for RL* series	
OMH-RLK29	Mounting bracket	
 OMH-RLK29-HW	Mounting bracket for rear wall mounting	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

4

# **Timer functions**

Timer function	Switching type		Receiver exposed
ON 1 2 3 4 Without	Light Dark		Receiver dark ON OFF
ON 1 2 3 4	Light		ON OFF
ON delay	Dark	ton ton	ON OFF
	Light		ON OFF ON
OFF delay	Dark		OFF
ON $\begin{bmatrix} 1 & 2 & 3 & 4 \\ \hline & \Box & \Box & \hline & \end{bmatrix}$ one shot	Light		OFF
	Dark	tos tos	OFF

Time  $t_{ON},\,t_{OFF}$  and  $t_{OS}$  are adjustable from 0.1 to 10 seconds. The Light-/Dark-Switch (Left, outer switch) is shown in the "Dark ON" position.

Туре	Description	Notes
-Z	OFF delay timer	Adjustable time interval
	one shot timer	(0.1 s - 10 s)
	ON delay timer	
	ON delay timer / OFF delay timer	
	ON delay timer / one shot timer	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"