


# Temperature Multi-Input FieldConnex® Fieldbus F2D0-TI-Ex8.FF.\*



- For 8 temperature or analog sensors
- Installation in Zone 1/Div. 1, intrinsically safe
- Sensors in Zone 0/Div. 1
- Connection to fieldbus acc. to FISCO or Enty
- For FOUNDATION Fieldbus H1
- PCS integration via device description and function blocks
- Concentrator method for simplified configuration
- Monitors sensor condition
- For T/C, RTD 2-, 3-, 4-wire, voltage and resistance
- Cold junction compensation
- Removable terminals


Temperature multi-input, stand-alone device with aluminum housing for field installation

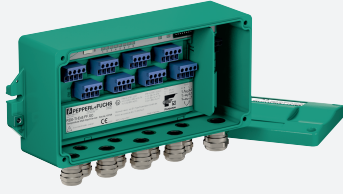

## Function

This fieldbus junction box holds a temperature multi-input device for transferring signals from resistance temperature measuring sensors and thermocouples, as well as resistance and millivolt signals via FOUNDATION Fieldbus H1. The fieldbus junction box with 8 inputs can be installed in Zone 1/Div. 1 with sensors located in Zone 0/Div. 1. The housing, type F2, is made of sturdy cast aluminum for installation in rough environments. Fieldbus and field device entrances can be selected individually from a range of cable glands. Optionally, either screw terminals or spring terminals can be chosen. A tag plate is available as option.

## Connection

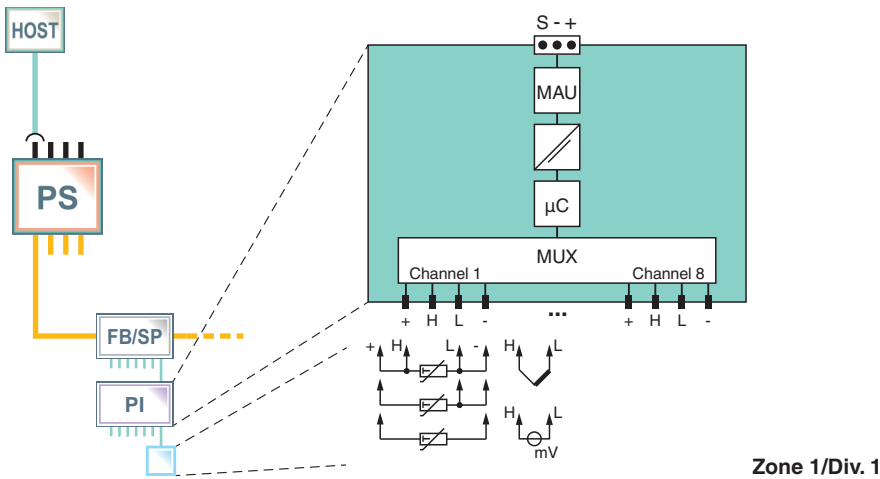

## Technical Data

General specifications	
Design / Mounting	Outside installation
Installation in hazardous area	Zone 1 / Div. 1
Electronic component	Temperature Multi-Input Device RD0-TI-Ex8.FF* For technical data on installed electronic component see datasheet.
Fieldbus connection	
Fieldbus type	FOUNDATION Fieldbus
Input	
Number	8

Release date: 2024-09-20 Date of issue: 2024-09-20 Filename: t158062\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

## Technical Data

<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
<b>Standard conformity</b>		
Galvanic isolation		EN 60079-11
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529
Fieldbus standard		IEC 61158-2
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
<b>Ambient conditions</b>		
Ambient temperature		see table 1
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		≤ 95 % non-condensing
Shock resistance		15 g , 11 ms
Vibration resistance		10 g , 10 ... 150 Hz
Corrosion resistance		acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>		
Connection type		plug-in terminals , spring terminal and screw terminal
Core cross section		
Bus		up to 2.5 mm <sup>2</sup>
Inputs		up to 2.5 mm <sup>2</sup>
Cable diameter		see table 2
Cable gland		sensor inputs M16, fieldbus M20
Housing material		Aluminum
Degree of protection		IP67
Mass		1800 g
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		PTB 03 ATEX 2237
Marking		Ⓜ II 2 (1) G Ex ia [ia Ga] IIC T4 Gb , Ⓜ II (1) G [Ex ia Ga] IIC , Ⓜ II (1) D [Ex ia Da] IIIC , Ⓜ II 3 G Ex ic IIC T4 Gc
Bus		FISCO see EC-Type Examination Certificate
Inputs		see EC-Type Examination Certificate
Certificate		PTB 03 ATEX 2238 X
Marking		Ⓜ II 3 G Ex nA IIC T4 Gc
Galvanic isolation		
Bus		see Statement of Conformity
Input		see EC-Type Examination Certificate
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012 , EN 60079-11:2012 , EN 60079-15:2010
<b>International approvals</b>		
IECEX approval		IECEX PTB 05.0001 , IECEX PTB 05.0002X
Approved for		Ex ia [ia Ga] IIC T4 Gb , [Ex ia Ga] IIC , [Ex ia Da] IIIC , Ex ic IIC T4 Gc , Ex nA IIC T4 Gc
<b>Certificates and approvals</b>		
Marine approval		DNV A-14038
<b>General information</b>		
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .


Release date: 2024-09-20 Date of issue: 2024-09-20 Filename: t158062\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

Assembly

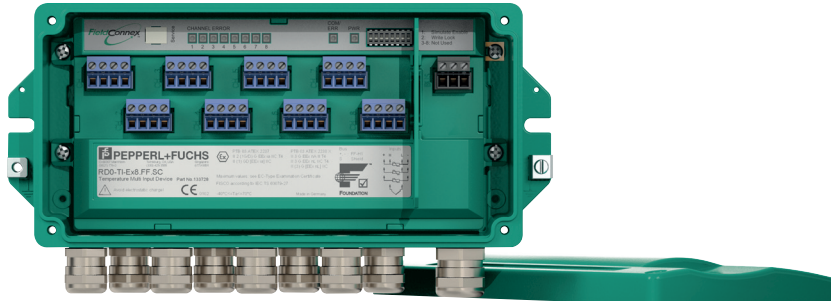

Release date: 2024-09-20 Date of issue: 2024-09-20 Filename: t158062\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

**Additional Information**

**Type Code**

**Type of housing**

**F2D0** Field housing, aluminum, IP67

**Type of device**

**TI** Temperature Multi-Input Device

**Explosion protection method**

**Ex** intrinsically safe

**Number of inputs**

**8**

**Fieldbus type**

**FF** FOUNDATION Fieldbus

**Type of connection**

**CG** Cable gland, plastic

**CGB** Cable gland, nickel plated brass

**CGS** Cable gland, stainless steel

**Type of terminal**

**ST** Screw terminals

**SC** Spring terminals

<b>F2D0</b>	-	<b>TI</b>	-	<b>Ex</b>	<b>8</b>	.	<b>FF</b>	.		.	
<b>A</b>	-	<b>B</b>	-	<b>C</b>	<b>D</b>	.	<b>E</b>	.	<b>F</b>	.	<b>G</b>

Identification for assignment of the type code to the following tables

**Example:**

F2D0-TI-Ex8.FF.CGB.ST: Temperature Multi-Input Device in aluminum housing with cable glands made of nickel plated brass and 8 inputs with screw terminals

**Note:**

Contact your Pepperl+Fuchs representative to check the availability of individual variants.

Dimensions and Assembly

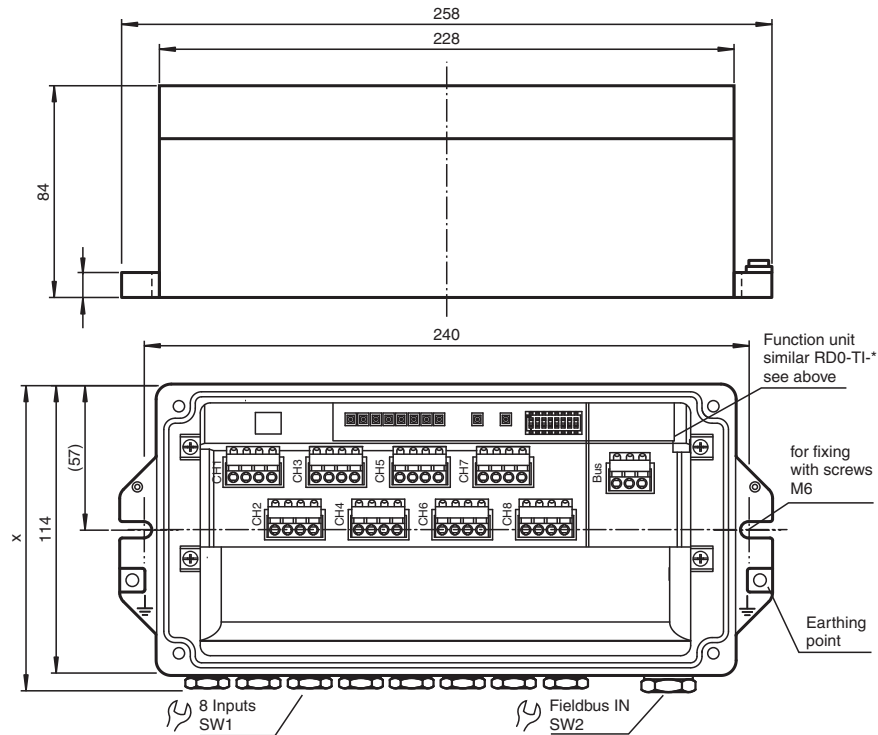


Figure 1: F2D0-TI-Ex8.FF.CGB.SC

Installation

see manual

Electrical Connection

Variations of cable connections, housing types and temperature ranges

Type of connection, identification F	Type of cable connection	Number of inputs, identification D	F2 housing, outside dimension "X" (mm)	Temperature range for use in hazardous area (°C)	Temperature range for use in safe area (°C)
CG	Terminals, cable glands plastic	8	140	-30 ... 70	-30 ... 85
CGB	Terminals, cable glands nickel plated brass	8	140	-40 ... 70	-40 ... 85
CGS	Terminals, cable glands stainless steel	8	140	-40 ... 70	-40 ... 85

Table 1

Cable diameter depending on cable gland

Type of connection, identification F	Sensors				Fieldbus			
	Type	Material	Cable diameter (mm)	SW1	Type	Material	Cable diameter (mm)	SW2
CG	M16 x 1.5	Plastic	5 ... 10	20	M20 x 1.5	Plastic	5 ... 13	24
CGB	M16 x 1.5	Nickel plated brass	5 ... 10	20	M20 x 1.5	Nickel plated brass	7 ... 12	24
CGS	M16 x 1.5	Stainless steel	5 ... 9	17	M20 x 1.5	Stainless steel	7 ... 12	24

Table 2

Release date: 2024-09-20 Date of issue: 2024-09-20 Filename: t1158062\_eng.pdf