

Model number


VAM-CTR-KF-R4

AS-Interface master RS 485 cabinet module


Features

- Stand-alone master with PLC functionality
- Two-digit LC display
- Voltage supply from AS-Interface
- · Automatic baud rate detection
- Programmable slave addresses
- Display of detected slaves
- Fault diagnosis
- Parameterization and monitor software
- Power Rail connection
- RS-485 interface


Dimensions

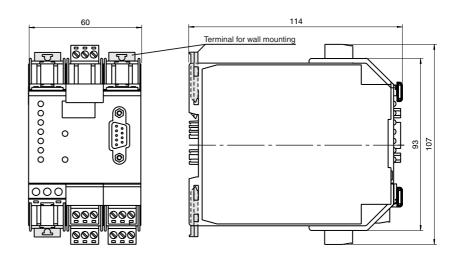

Electrical connection

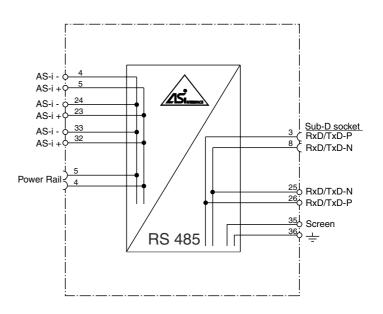

Indicating / Operating means

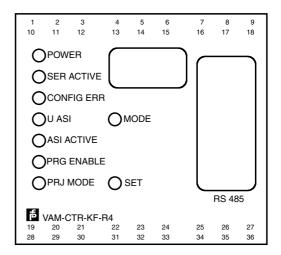

Function

The VAM-CTR-KF-R* is a stand-alone master with integrated PLC functionality. The design of this master is ideal for use in a cabinet. Its housing, only 60 mm wide, occupies little space in a cabinet installation. The VAM-CTR-KF-R* is installed by snapping it onto the 35 mm DIN Rail per EN 50022, with the integrated Power Rail. The AS-Interface signal is transmitted through conductors, which are integrated into the Power Rail. Thus all cabinet modules in KF housing can be connected to the AS-Interface cable by simply snapping them onto the DIN Rail. Removable terminals for leading the AS-Interface cable through the cabinet are available. These terminals are coded and allow "online" maintenance, i. e. while the system is under power. The connection to the AS-Interface power supply is established through these terminals which can also be used for the serial interface. A 9-pin SubD connector is also available. Power to the master is supplied by the AS-Interface cable.

Two push buttons are used for address assignment of the AS-Interface slaves and acceptance of the desired configuration. In configuration mode, all detected AS-Interface slaves are displayed on the 2-digit LCD. In normal operation, the LCD is blank unless the master detects a faulty AS-Interface slave. There are 7 LEDs on the front panel, showing the current status of the AS-Interface line.

PLC Functionality

The VAM-CTR-KF-R* provides 16 kBytes of program memory, 8 kBytes of main memory, 1024 counters and 1024 timers for PLC functionality. These capacities suffice to process data on the AS-Interface. Thus the master can also be operated in "stand-alone" mode. The program processing time is approximately 1000 word commands every 2 ms. The programming language is based upon the STEP5® programming language.

Accessories

VAZ-SW-ACT32

Full version of the AS-I Control Tools including connection cable

UPR-05

Universal Power Rail with end caps and cover, 5 conductors, length: 2 m

PEPPERL+FUCHS

VAZ-R4-R2

RS 232C/RS 485 converter

039199_eng.xml