



# **Electrical connection**

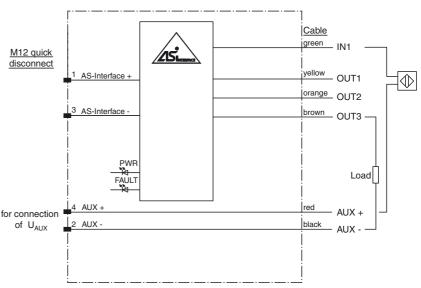

## Indicating / Operating means

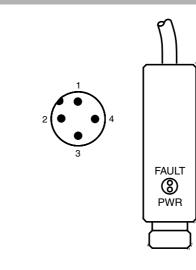

٠

•

•

•

•

•

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" USA: +1 330 486 0001 Pepperl+Fuchs Group

www.pepperl-fuchs.com fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



### AS-Interface sensor/actuator module

Technical data			
General specifications			
Slave type		Standard slave	
Functional safety related parame	ters		
MTTF <sub>d</sub>		350 a at 30 °C	
Indicators/operating means			
LED FAULT		communication error / address is 0;	I FD red
LED PWR		AS-Interface voltage; LED green	
Electrical specifications		····	
Auxiliary voltage (output)	U <sub>AUX</sub>	24 V DC ± 15 % PELV (protection class 3 according to VDE 0106/IEC 364-4-41)	
Rated operating voltage	Ue	26.5 31.6 V from AS-Interface	
Rated operating current	l <sub>e</sub>	≤ 20 mA	
Input			
Number/Type		1 Input for 2-wire sensor	
Supply		from external auxiliary voltage UAUX	
Switching point		$OFF \le 0.8 \text{ mA}$ $ON \ge 5 \text{ mA}$	
Output			
Number/Type		3 electronic outputs, PNP	
Supply		from external auxiliary voltage U <sub>AUX</sub>	
Current		20 mA per output	
Directive conformity			
Electromagnetic compatibility			
Directive 2014/30/EU		EN 62026-2:2013	
Standard conformity			
Degree of protection		EN 60529:2000	
AS-Interface		EN 62026-2:2013	
Programming instructions			
Profile		S-9.F	
IO code		9	
ID code		F	
ID2 code		0	
Data bits (function via AS-Interfac	e)	input	output
D0		-	OUT1
D1		-	OUT2
D2		-	OUT3
D3		IN1	-
Parameter bits (programmable via AS-i)			
P0		not used	
P1		not used	
P2 P3		not used	
		not used	
Ambient conditions			
Ambient temperature		0 70 °C (32 158 °F) -40 70 °C (-40 158 °F)	
Storage temperature		-40 70 °C (-40 158 °F)	
Mechanical specifications Degree of protection		IP67 according to EN 60529	
i		The protection class appplies only for installation of the module in a connection housing for parts of the module located outside of the connection housing (external M12 connection, inside cable connection). The housing duct must be sealed with a suitable adhesive.	
		cable connection).	ith a suitable adhesive
Connection		cable connection).	/12x1 round connector

### Function

The cylindrical AS-Interface module permits an easy connection of standard actuators to the AS-Interface. The input/output combination of 1:3 makes it particularly suitable for operation with motors (start/stop, forward/reverse, rotational speed 1/2, alarm indication); this means that all other actuators can also be easily connected to the AS-Interface. By means of mechanical adaptor nuts, the AS-Interface slave attaches to PG cable glands as well as metric cable glands. MOVI-MOT<sup>®</sup> from SEW-Eurodrive requires an M25 adaptor with M18 x 1 quick disconnects which is included in the delivery package. The mechanically strong and short design is an advantage of the stainless steel head ferrule in well-tried and tested Pepperl+Fuchs quality.

The M12 plug establishes a connection to AS-Interface and to the auxiliary supply. Two LEDs show the voltage supply and AS-Interface communication errors. Using additional auxiliary power does not overload the AS-Interface power supply. Therefore, up to 31 cylinder modules can be connected to the AS-Interface line.

#### Accessories

#### VAZ-2T5-G2

Splitter box AS-Interface and auxiliary voltage to 5 x M12 round connector

#### VAZ-2T1-FK-1M-PUR-V1-W

Splitter box AS-Interface and auxiliary voltage to 1 x M12 round connector

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Pepperl+Fuchs Group www.pepperl-fuchs.com

2

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

