











# Height of the protected area Housing length

# **Model Number**

### SLC-4/151

with 2 separate fail-safe semiconductor outputs

### **Features**


- Sensing range up to 20 m
- 2, 3, and 4-beam design
- Beam distance 300, 400 and 500 mm
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- Start/Restart disable
- Degree of protection IP67
- 7-segment diagnostic display
- Pre-fault indication
- Connection via appliance socket M12 x h1
- Safety outputs OSSD in potential-separated semiconductor version
- Optional with relay monitor (Option 129)

### **Electrical connection**

Receiver

**Dimensions** 

Emitte



### **Pinout**







Receiver


Technical data	
System components	
Emitter	SLC-4-T/92
Receiver	SLC-4-R/151
General specifications	
Effective detection range	0.2 20 m
Light source	IRED
Light type	modulated infrared light
LED risk group labelling	exempt group
Tests	IEC/EN 61496
Safety type according to IEC/EN 61496	4
Target size	50 mm
Beam spacing	300 mm
Number of beams	4
Operating mode	can be selected with or without start/restart disable
Angle of divergence	<5 °
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 3
Performance level (PL)	PL e
Category	Cat. 4
Mission Time (T <sub>M</sub> )	20 a 7.27 E-9
PFH <sub>d</sub>	7.27 E-9 4
Type	T
Indicators/operating means	7 cognost display in amitter
Operation indicator	7-segment display in emitter 7-segment display in receiver
Diagnostics indicator Function indicator	in receiver:
Tunction indicator	LED red: OSSD off LED green: OSSD on
	LED yellow: Protected area free, system start-ready
Pre-fault indicator	LED orange
Control elements	switch for start/restart disable, transmission coding
Electrical specifications	
Operating voltage U <sub>B</sub>	24 V DC (-30 %/+25 %)
No-load supply current I <sub>0</sub>	Emitter: 100 mA , receiver 150 mA
Protection class	
Input	
Activation current	approx. 10 mA
Activation time	0.03 1 s
Test input	Reset-input for system test (not for option /129) Start release
Function input	Start release
Output Safety output	2 separated fail safe semiconductor outputs
Signal output	1 PNP, max. 100 mA for start readiness
Switching voltage	Operating voltage -2 V
Switching current	max. 0.5 A
Response time	10 ms
Conformity	
Functional safety	ISO 13849-1
Product standard	EN 61496-1 ; IEC 61496-2
Ambient conditions	
Ambient temperature	0 55 °C (32 131 °F)
Storage temperature	-25 70 °C (-13 158 °F)
Relative humidity	max. 95 %, not condensing
Mechanical specifications	
Degree of protection	IP67
Connection	Emitter: M12 connector, 4-pin Receiver: M12 connector, 8-pin
Material	
Housing	extruded aluminum profile, RAL 1021 (yellow) coated
Optical face	Plastic pane
Mass	Per 3450 g
Approvals and certificates	05
CE conformity	CE
UL approval	CULus Listed
CCC approval TÜV approval	CCC approval / marking not required for products rated ≤36 V TÜV
ι ο ν αρριοναι	107

PEPPERL+FUCHS

# **Curves/Diagrams**

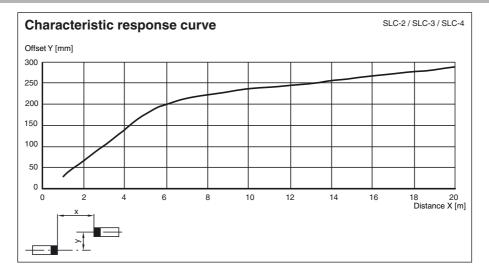

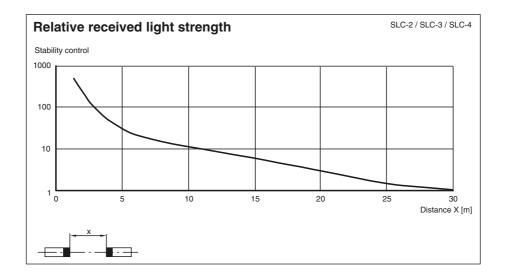

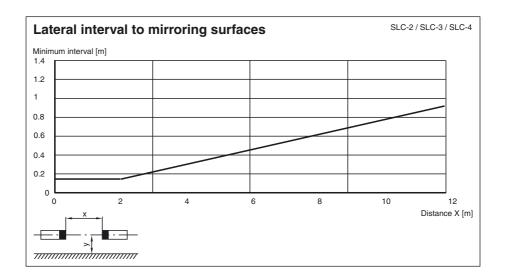

# **Additional information**

# Profile dimensions, front view



### **System accessories**

- Mounting set SLC
- Protective glass pieces for SLC (to protect the optically functional surface)
- Lateral screwed connection SLC
- Mirror 2, 3 or 4-beam for SLC (for multi-side securing of hazardous areas)
- · Laser alignment aid BA SLC
- Profile alignment aid PA SLP/SLC
- Ground pillar UC SLP/SLC
- Housing for ground pillar Enclosure UC SLP/SLC
- Collision protector Damping UC SLP/SLC

**EPPERL+FUCHS**