

Triangulation sensor (BGS) OBT43-R102-2P1-IO-V31



- Miniature design with versatile mounting options
- Best background suppressor in its class
- Precision object detection, almost irrespective of the color
- Extended temperature range -40 °C ... 60 °C
- High degree of protection IP69K
- IO-Link interface for service and process data

Triangulation sensor with background suppression








Function


The miniature optical sensors are the first devices of their kind to offer an end-to- end solution in a small single standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

Dimensions

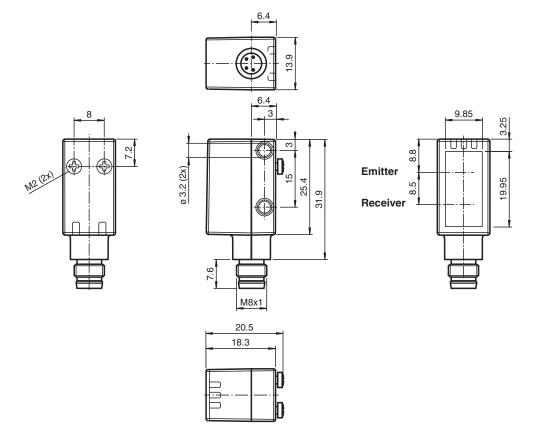




Technical Data **General specifications** 10 ... 40 mm Detection range Detection range max. 10 ... 43 mm Background suppression starts from 43 mm Light source LED Light type modulated visible red light LED risk group labelling exempt group Black-white difference (6 %/90 %) approx. 1 mm Diameter of the light spot approx. 3 mm at 40 mm Angle of divergence approx. 5° Ambient light limit EN 60947-5-2: 40000 Lux Functional safety related parameters 600 a $MTTF_d$ Mission Time (T_M) 20 a Diagnostic Coverage (DC) 0 % Indicators/operating means LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode Operation indicator Function indicator LED yellow: constantly on - object detected constantly off - object not detected **Electrical specifications** 10 ... 30 V 18 ... 30 V (IO-Link) Operating voltage U_{B} max. 10 % Ripple No-load supply current max. 25 mA (at 24 V) Protection class Interface Interface type IO-Link IO-Link revision Identification & Diagnosis - I&D Smart Sensor - SSP 0 Device profile Process data Input 1 Bit - switching signal 1 Bit output 2 Bit - Emitter deactivation 1 Bit evaluation freeze 1 Bit Vendor ID 1 (0x0001) 1115425 (0x110521) Device ID Transfer rate COM2 (38.4 kBit/s) Min. cycle time 2.3 ms SIO mode support ves Compatible master port type Class A Output C/Q - Pin4: NPN normally closed / dark-on, PNP normally open / light-on, IO-Link /Q - Pin2: NPN normally open / light-on, PNP normally closed / dark-on Switching type Signal output 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected max. 30 V DC Switching voltage Switching current max. 100 mA, resistive load Usage category DC-12 and DC-13 Voltage drop U_{d} ≤ 1.5 V DC Switching frequency 1000 Hz Response time 0.5 ms Conformity Communication interface IEC 61131-9 / IO-Link V1.1.2

Technical Data

Product standard	EN 60947-5-2
Approvals and certificates	
UL approval	E87056, cULus Listed, class 2 power supply, type rating 1
Ambient conditions	
Ambient temperature	-40 60 °C (-40 140 °F)
Storage temperature	-40 70 °C (-40 158 °F)
Mechanical specifications	
Housing width	13.9 mm
Housing height	31.9 mm
Housing depth	18.3 mm
Degree of protection	IP67 / IP69 / IP69K
Connection	M8 x 1 connector, 4-pin
Material	
Housing	PC (Polycarbonate)
Optical face	Float glass
Mass	approx. 10 g

Connection



Connection Assignment




Wire colors in accordance with EN 60947-5-2


1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)


Assembly

Release date: 2021-09-02 Date of issue: 2021-09-02 Filename: 267075-100615_eng.pdf



- Operating indicator / dark on
- 2 Signal indicator
- 3 Operating indicator / light on

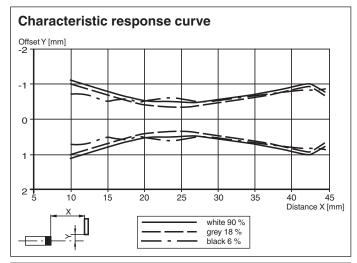

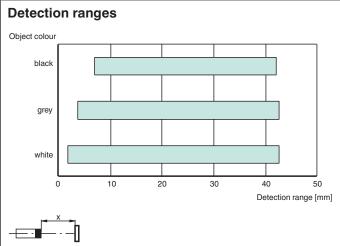

Accessories

	IO-Link-Master02-USB	IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection
2	V31-GM-2M-PUR	Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable grey
2	V31-WM-2M-PUR	Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey