


Sensor output interface terminal KCD2-E1

- 1-channel terminal amplifier
- NAMUR sensor input
- DC 24 V supply voltage
- Standard interface for prevention of signal transmission errors
- Switching status indicator, yellow LED
- Short-circuit proof electronic output
- Low noise sensitivity
- Compact terminal housing
- Clips onto standard 35 mm rail to DIN EN 50 022
- Degree of protection IP20

Sensor output interface terminal



Dimensions

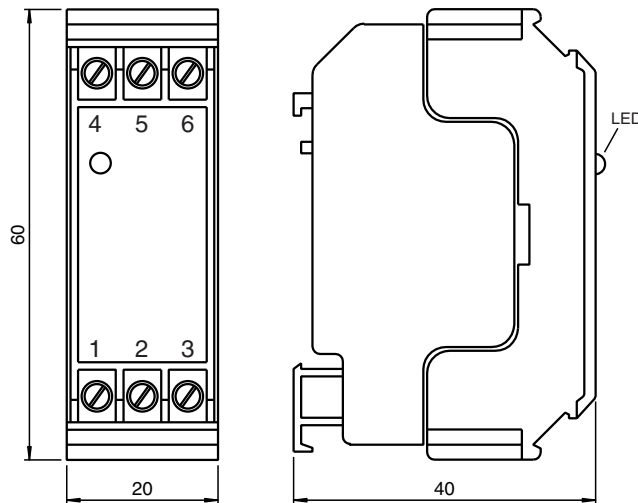

Technical Data

Functional safety related parameters

MTTF_d 1612 a

Indicators/operating means

LED yellow switch output

Electrical specifications

Operating voltage U_B 10 ... 30 V DC

Ripple ≤ 10 %

Operating current I_B approx. 22 mA

Input

Connection terminals 1+, 2-

Technical Data

Connectable sensor types	NAMUR
Pulse length/pulse interval	≥ 0.5 ms / ≥ 0.5 ms
Short-circuit current	approx. 8 mA
Sensor supply	8 V DC
Switching point	1.2 ... 2.1 mA hysteresis approx. 0.2 mA
Line fault detection	without
Trip value	1 kHz
Output	
Connection	terminal 4-
Current	200 mA short-circuit protected
Transistor	NPN
Signal level	$U_B - 1.8V$
Transfer characteristics	
Mode of operation	NC contact
Switching frequency	1 kHz
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013
Standard conformity	
Degree of protection	EN 60529:2000
Noise immunity	EN 61326-1:2013
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications	
Connection	self-opening apparatus connection terminals, max. core cross-section 0.34 ... 2.5 mm ²
Mass	60 g
Dimensions	20x60x40 (in mm)

Connection

