

# Temperature Converter S1SD-1TI-1U

- 1-channel signal conditioner
- 24 V DC supply
- Thermocouple, RTD, potentiometer or mV input
- Input for PTC thermistor
- Current and voltage output
- Line fault (LFD) and sensor burnout detection
- Accuracy 0.1 %
- Connection via screw terminals



## Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits.

The device has an input for signals of the following field devices:

- resistance thermometers
- thermocouples
- PTC thermistors
- potentiometers
- voltage sources
- field device with its own characteristic

The device provides the following standard signals at the output:

- 0/2 mA ... 10 mA signal
- 0/4 mA ... 20 mA signal
- 0/1 V ... 5 V signal
- 0/2 V ... 10 V signal

This device has an integrated cold junction compensation. You can also implement external cold junction compensation.

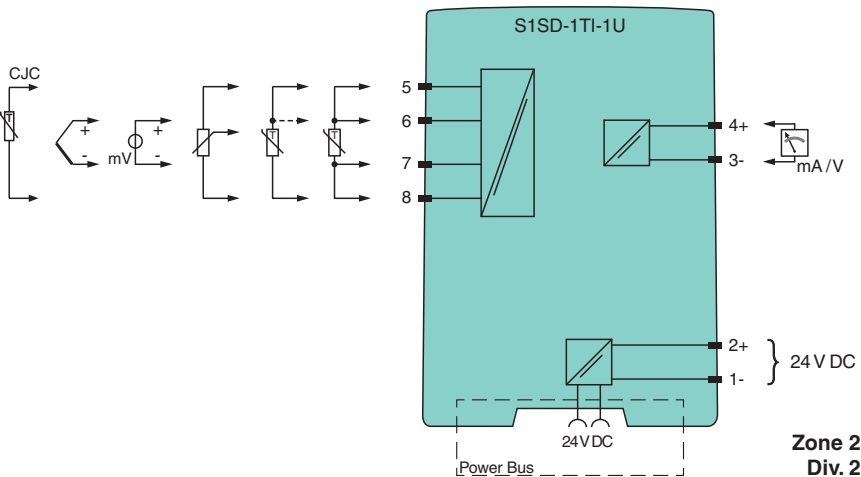
A fault is signalized by LEDs.

The device is easily configured by the use of DIP switches.

The Teach-In function can be used to teach in the potentiometer start value and end value.

The device can be powered via terminals or Power Bus.

## Connection



**Zone 2  
Div. 2**

## Technical Data

### General specifications

Signal type	Analog input
Operation time	MTBF: 353 a acc. to SN 29500 stationary continuous operating, average ambient temperature 40 °C (104 °F)

Release date: 2023-03-13 Date of issue: 2023-03-13 Filename: 276400\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

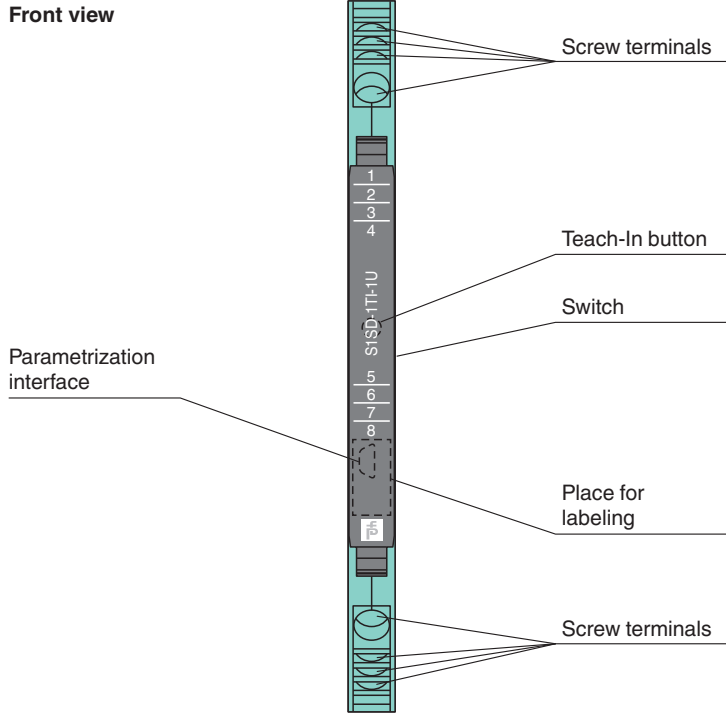
Supply		
Connection		Power Bus or terminals 1-, 2+
Rated voltage	$U_r$	16.8 ... 31.2 V DC
Power dissipation		0.7 W
Power consumption		0.8 W
Interface		
Programming interface		programming socket
Input		
Connection side		field side
Connection		terminals 5, 6, 7, 8
PTC		type KT, KTY, ST
Measuring current		approx. 200 $\mu$ A
Types of measuring		2-, 3-, 4-wire connection
Lead resistance		$\leq 100 \Omega$ per line
Measurement loop monitoring		sensor breakage, lead breakage, short circuit
RTD		type Pt100, Pt200, Pt500, Pt1000 (EN 60751:1995) type Ni100, Ni200, Ni500, Ni1000 (DIN 43760)
Measuring current		approx. 200 $\mu$ A
Types of measuring		2-, 3-, 4-wire connection
Lead resistance		max. 100 $\Omega$ per line
Measurement loop monitoring		sensor breakage, lead breakage, short circuit
Thermocouples		type B, E, J, K, N, S, T (IEC 584-1:1995) type L, U (DIN 43710:1985) type C, D (ASTM E988)
Cold junction compensation		external (Pt100) and internal, manually
Lead resistance		max. 10 k $\Omega$
Measurement loop monitoring		sensor breakage, lead breakage
Resistor		
Measurement range		0 ... 5 k $\Omega$
Potentiometer		0.2 ... 50 k $\Omega$
Types of measuring		3-wire connection
Voltage		-100 ... 100 mV -1000 ... 1000 mV
Input resistance		$\geq 1 \text{ M}\Omega$
Output		
Connection side		control side
Connection		terminals 3-, 4+
Analog voltage output		0/1 ... 5 V, 0/2 ... 10 V, load $\geq 2 \text{ k}\Omega$
Analog current output		0/2 ... 10 mA, 0/4 ... 20 mA, load $\leq 600 \Omega$
Ripple		$\leq 10 \text{ mV}_{\text{eff}}$
Fault signal		downscale or upscale
Transfer characteristics		
Accuracy		max. 0.1 % of full-scale value
Measuring time		$\leq 300 \text{ ms}$
Deviation		
RTD		$< 0.1 \text{ K}/0.05 \%$ of the measured value
Thermocouples		$< 0.3 \text{ K}/0.1 \%$ of the measured value
Voltage		$< 0.1 \%$ of the measured value
Potentiometer		$< 0.02 \%$ of the measured value
Influence of ambient temperature		$< 100 \text{ ppm/K}$ of full-scale value
Galvanic isolation		
Output/power supply		safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 $V_{\text{eff}}$ test voltage 3 kV, 50 Hz, 1 min
Input/Other circuits		safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 $V_{\text{eff}}$ test voltage 3 kV, 50 Hz, 1 min

Release date: 2023-03-13 Date of issue: 2023-03-13 Filename: 276400\_eng.pdf









## Technical Data

<b>Indicators/settings</b>	
Control elements	DIP switch keys
Configuration	via DIP switches via keys via software
Labeling	space for labeling at the front
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
<b>Conformity</b>	
Degree of protection	IEC 60529:2001
Protection against electrical shock	EN 61010-1:2010
<b>Ambient conditions</b>	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>	
Degree of protection	IP20
Connection	screw terminals
Core cross section	0.5 ... 2.5 mm <sup>2</sup> (20 ... 14 AWG)
Mass	approx. 70 g
Dimensions	6.2 x 97 x 107 mm (0.24 x 3.82 x 4.21 inch) (W x H x D) , housing type S1
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>	
Certificate	DEMKO 16 ATEX 1750X
Marking	Ⓜ II 3G Ex nA IIC T4 Gc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-15:2010
<b>International approvals</b>	
UL approval	E106378
IECEx approval	
IECEx certificate	IECEx UL 16.0116X
IECEx marking	Ex nA IIC T4 Gc
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

**Assembly**



**Matching System Components**

	<b>S1SD-2PF</b>	Power Feed Module
	<b>SC-Config</b>	Configuration software
	<b>S-ADP-USB</b>	Adapter with USB Interface
	<b>PACTware 5.0</b>	FDT Framework
	<b>POWERBUS-SETL5.250</b>	Power bus for 35 mm DIN mounting rail, height: 7.5 mm, length: 250 mm
	<b>POWERBUS-SETH5.250</b>	Power bus for 35 mm DIN mounting rail, height: 15 mm, length: 250 mm
	<b>POWERBUS-COV.250</b>	Cover for 35 mm DIN mounting rail, length: 250 mm
	<b>POWERBUS-CAP</b>	End Cap for Power Bus

Release date: 2023-03-13 Date of issue: 2023-03-13 Filename: 276400\_eng.pdf