

Intrinsically safe Ethernet Isolator EI-0D2-10Y-10B-LT

- Galvanic isolation between intrinsically safe and non-intrinsically safe port
- 10/100 MBit/s according to IEEE 802.3/.3u
- Installation in Zone 2, Ethernet in Zone 1 or Zone 0
- Standard Ethernet patch or crossover cable
- DIN rail mounting and OEM version

Ethernet Isolator with temperature range -20 °C ... +55 °C








Function

The Ethernet Isolator is an intrinsically safe isolated barrier. It enables cost effective and simple installation in hazardous areas up to Zone 0. It supports high-speed Ethernet and can be mounted in Zone 2.

At each end of the trunk, an Ethernet Isolator is installed. In combination, they provide the intrinsically safe energy limitation. The Ethernet Isolator offers a wire-based alternative to wireless LAN, fiber optic solutions, and Ex e installations.

In safe area applications, a single Ethernet Isolator can be used for galvanic isolation. The Ethernet Isolator is compatible with all IEEE standards. It provides high noise immunity and low heat dissipation in a compact housing.

Connection

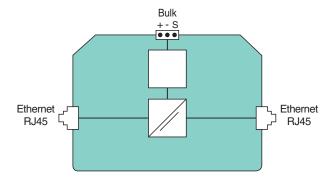

Zone 2/Div. 2

Technical Data

Supply		
Rated voltage	U_{r}	19.2 35 V DC
Rated current	l _r	150 100 mA
Power dissipation		3 W
Ethernet Interface		
Intrinsically safe port		10 BASE-T/100 BASE-TX
Non-intrinsically safe port		10 BASE-T/100 BASE-TX
Connection type		2 x RJ-45 , IEC 60603-7
Connector pinout		socket; EIA/TIA 568 B
Transfer rate		10/100 Mbit/s , Auto-Negotiation
Transfer rate		10/100 Mbh/s , Auto-Negotiation

Technical Data		
On suching and de		holf/full divides
Operating mode		half/full duplex
Cable type		CAT5e S/FTP AWG 24, Installation cable, L/R ratio max. 10 $\mu\text{H}/\Omega$ of all strand combinations
I.S. cable length		typ. 100 m/20 °C
Total cable length		typ. 200 m/20 °C
Number of isolators		max. 2 in series connection
Indicators/operating means		
LED PWR		green: Power on
LED ACT		yellow: communication active
LED 10/100		yellow ON: Transfer rate 100 MBit/s , OFF: 10 MBit/s
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
Standard conformity		
Galvanic isolation		EN 50020
Degree of protection		IEC 60529
Climatic conditions		DIN IEC 721
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Ethernet		IEEE 802.3, IEEE 802.3u
Ambient conditions		
Ambient temperature		-20 55 °C (-4 131 °F)
Storage temperature		-40 85 °C (-40 185 °F)
Relative humidity		≤ 95 % non-condensing
Shock resistance		15 g 11 ms
Vibration resistance		1 g 10 150 Hz
Pollution degree		max. 2, according to IEC 60664
Mechanical specifications		
Connection type		Terminals
Core cross section		up to 2.5 mm ²
Housing material		Polyamide PA 66
Degree of protection		IP20 according to EN 60529
Mass		195 g
Mounting		DIN rail mounting
Data for application in connection with ha	azardous a	reas
EU-type examination certificate		PTB 07 ATEX 2025 X
Marking		 □ II (1) G [Ex ia Ga] IIB , □ II (1) D [Ex ia Da] IIIC , □ II 3(1)G Ex nA [ia Ga] IIB T4 Gc □ II 3(1)G Ex nA [ia Ga] IIB T4 Gc □ I (M1) [Ex ia Ma] I
Supply		
Maximum safe voltage	U_{m}	253 V AC
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012, EN 60079-11:2012, EN 60079-15:2010
International approvals		
CSA approval		CSA 15.70016295
Control drawing		116-B032
Approved for		Class I, Zone 2, AEx/Ex nA [ia Ga] IIB T4 Gc Class I, Zone 2, AEx/Ex nA [ia Da IIIC] IIB T4 Gc
IECEx approval		IECEx PTB 09.0053X
Approved for		[Ex ia Ga] IIB [Ex ia Da] IIIC Ex nA [ia Ga] IIB T4 Gc Ex nA [ia IIIC Da] IIB T4 Gc [Ex ia Ma] I
Certificates and approvals		•
• •		

Technical Data Patents This product may be covered by the following patent: US7,687,791 **General information** EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com. Supplementary information


Assembly



5 PEPPERL+FUCHS

Additional Information

Dimensions and Assembly

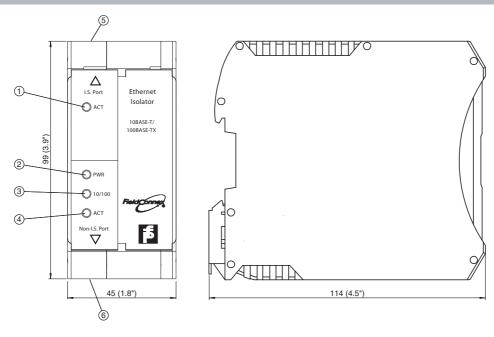


Description:

- 1 LED Communication active intrinsically safe port
- 2 LED Power
- LED Transfer rate

- 4 LED Communication active non-intrinsically safe port
- Intrinsically safe connector female
- 6 Non-Intrinsically safe connector female

Installation

Examples

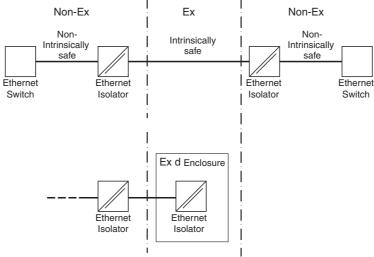

Installation notes see manual.

Ethernet Cable Overview for Interconnection

The cross-table below gives a general idea which Ethernet cable has to be used for interconnection of two Ethernet Isolators or an Ethernet Isolator to another device.

	Ethernet Isolator I.Sport	Ethernet Isolator non-I.Sport
Ethernet Isolator I.Sport	Crossover cable	not allowed
Switched standard-port	not allowed	Crossover cable
Switch uplink-port	not allowed	Standard patch cable
Notebook	not allowed	Standard patch cable
Workstation	not allowed	Standard patch cable

Device with auto-crossover	not allowed	Standard patch cable
functionality		