

Relay Module

KFD0-RSH-1.1D.F1


- 1-channel signal conditioner
- 24 V DC supply (loop powered)
- Logic input 19 V DC ... 26.5 V DC, non-polarized
- Relay contact output for de-energized to safe function
- Test pulse immunity
- Up to SIL 3 acc. to IEC/EN 61508
- Up to PL e acc. to EN/ISO 13849

CE SIL3 PL e

Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits. The device is a relay module that is suitable for safely switching applications of a load circuit. The device isolates load circuits up to 230 V and the 24 V control circuit. The de-energized to safe (DTS) function is permitted for SIL 3 and PL e applications. The relays are of diverse design, but have a common effect on the individual switching output. For testing of the relays, test terminals can be used. The test mode will be indicated by a LED according to NAMUR NE44. The output is protected against contact welding by a fuse.

Wiring Diagram

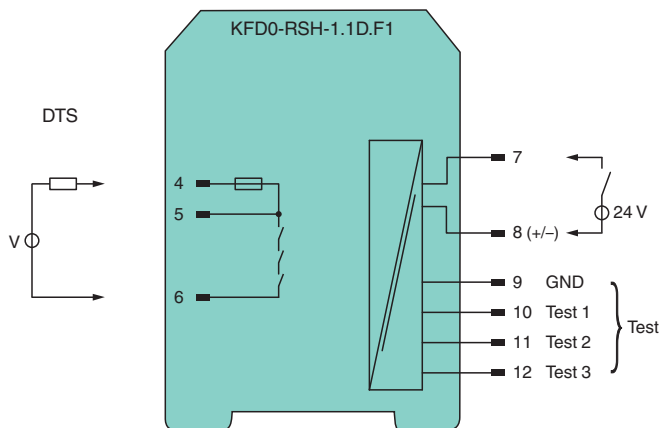

Technical Data

General specifications

Signal type	Digital Output
-------------	----------------

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3
Systematic capability (SC)	SC 3
Performance level (PL)	PL e

Supply

Connection	loop powered
Rated voltage	U_r 19 ... 30 V DC loop powered
Power dissipation	< 1.5 W
Power consumption	< 1.5 W

Input

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

Connection side		control side
Connection		Input terminals 7, 8 ; test input terminals 9, 10, 11, 12
Pulse/Pause ratio		150 ms / 150 ms
Test pulse length		max. 4 ms from DO card
Test input		see functional safety manual
Signal level		0-signal: -5 ... 5 V 1-signal: 19 ... 26.5 V
Rated current	I_r	0-signal: typ. 1.6 mA at 1.5 V DC; typ. 8 mA at 3 V DC (maximum leakage current DO card) 1-signal: ≥ 36 mA (minimum load current DO card)
Output		
Connection side		field side
Connection		terminals 4, 5, 6
Contact loading		253 V AC/5 A/cos ϕ 0.7; 30 V DC/5 A resistive load 253 V AC / 1/2 HP
Minimum switch current		10 mA / 24 V DC
Energized/De-energized delay		150 ms / 150 ms
Mechanical life		5 x 10 ⁶ switching cycles
Fuse rating		2.5 A (scope of delivery) max. 5 AT, recommended maximum utilization of the fuse: 80 %
Transfer characteristics		
Switching frequency		< 3 Hz
Galvanic isolation		
Input/Output		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Indicators/settings		
Display elements		LEDs
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Low voltage		
Directive 2014/35/EU		EN 61010-1:2010
Machinery Directive		
Directive 2006/42/EC		EN IEC 62061:2021 , EN/ISO 13849-1:2015
Conformity		
Electromagnetic compatibility		NE 21:2012 , EN 61326-3-1:2008 , EN 61326-3-2:2008
Degree of protection		IEC 60529:2013
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F) Observe the temperature range limited by derating, see section derating.
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 120 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) (W x H x D) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .


Release date: 2025-10-13 Date of issue: 2025-10-13 Filename: 70131899_eng.pdf

Assembly

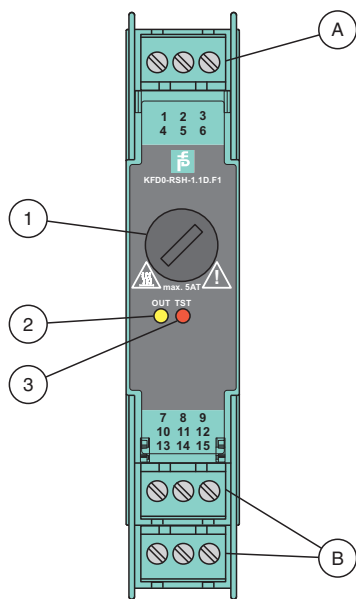

1	Fuse carrier
2	LED yellow: Relay output
3	LED red: Test
A	Removable terminal, green
B	Removable terminals, green


Characteristic Curve

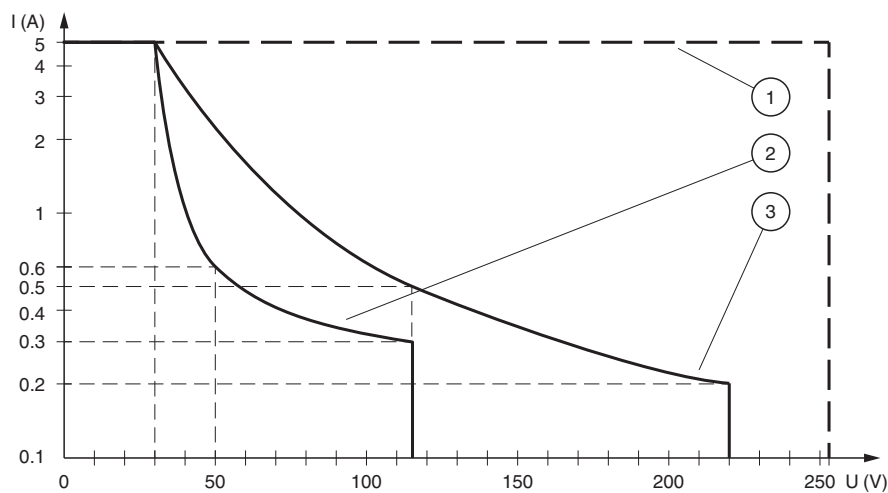

—	Resistive load DC
---	Resistive load AC
1	max. 10^5 switching cycles
2	max. 10^5 switching cycles
3	max. 3×10^4 switching cycles

The maximum number of switching cycles is depending on the electrical load and may be higher if reduced currents and voltages are applied.

Characteristic Curve

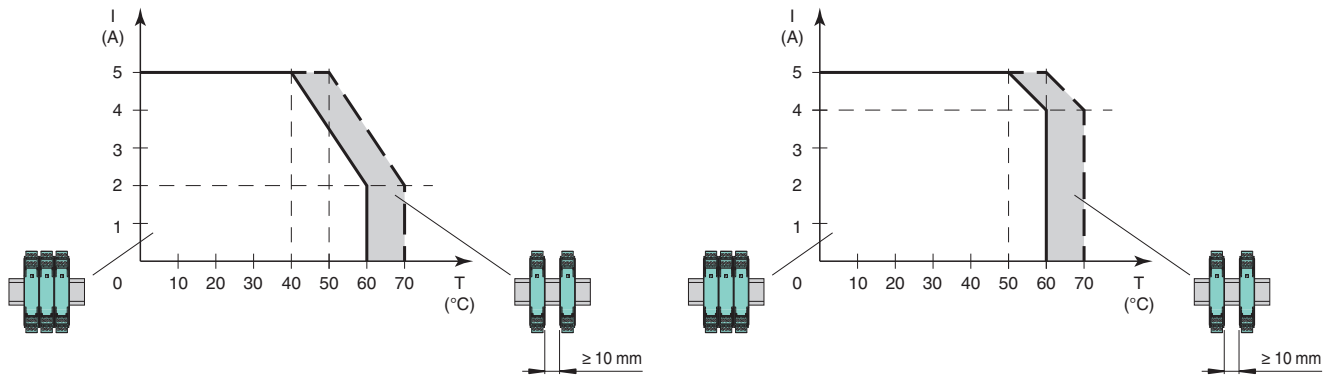

Derating

————	fused 5 AT	————	unfused
-----	fused 5 AT, 10 mm	-----	unfused, 10 mm
U_I	26.5 V	U_I	26.5 V