

# Triangulation sensor (BGS) OBT30-R2-E0-0,2M-V31-P-L



- Ultra-small housing design
- DuraBeam Laser Sensors durable and employable like an LED
- 45° cable outlet for maximum mounting freedom under extremely tight space constraints
- Precision object detection, almost irrespective of the color


Laser triangulation sensor with background suppression, ultra-small design with M2 mounting, 30 mm sensing range, light on, NPN output, 200 mm fixed cable with plug M8, 4-pin



#### **Function**


The R2 series nano sensor has been developed for a broad range of applications. It offers excellent durability and is exceptionally easy to install. The housing is compact and, with its 45° cable outlet, can be installed in the smallest spaces. New functional principles and functionality open up a range of new options. The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

#### **Dimensions**

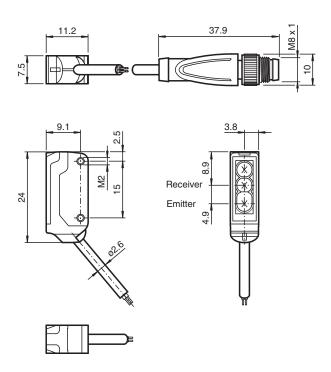

#### **Technical Data**

General specifications	
Detection range	7 30 mm
Reference target	standard white, 100 mm x 100 mm
Light source	laser diode
Light type	modulated visible red light , 680 nm



**Technical Data** 

#### Laser nominal ratings Note LASER LIGHT, DO NOT STARE INTO BEAM Laser class Wave length 680 nm Beam divergence > 5 mrad Pulse length approx. 3 µs Repetition rate approx. 16.6 kHz max. pulse energy 9.5 nJ Black-white difference (6 %/90 %) < 5 % at 30 mm < 1 mm at a distance of 30 mm Diameter of the light spot Opening angle approx. 2 Optical face frontal Ambient light limit EN 60947-5-2: 30000 Lux Functional safety related parameters $\mathsf{MTTF}_\mathsf{d}$ 800 a Mission Time (T<sub>M</sub>) 20 a 0 % Diagnostic Coverage (DC) Indicators/operating means Operation indicator LED green: Power on flashing: Short circuit/overload indication Function indicator LED yellow ON: lights when object is detected **Electrical specifications** Operating voltage $U_{\text{R}}$ 12 ... 24 V No-load supply current < 10 mAProtection class Ш Output Switching type NO contact / light-on Signal output 1 NPN output, short-circuit protected, reverse polarity protected, open collector max. 30 V DC Switching voltage Switching current max. 50 mA, resistive load Voltage drop $U_{\text{d}}$ ≤ 1.5 V DC Switching frequency approx. 2 kHz Response time 250 μs Conformity Product standard EN 60947-5-2 EN 60825-1:2007 Laser safety Approvals and certificates **UL** approval E87056, cULus Recognized, Class 2 Power Source CCC approval CCC approval / marking not required for products rated ≤36 V FDA approval IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations

FDA approval	pursuant to Laser Notice No. 50, dated June 24, 2007
Ambient conditions	
Ambient temperature	-20 60 °C (-4 140 °F)
Storage temperature	-30 70 °C (-22 158 °F)
Mechanical specifications	
Housing width	7.5 mm
Housing height	24 mm
Housing depth	11.2 mm
Degree of protection	IP67
Connection	200 mm fixed cable with 4-pin, M8x1 connector
Material	
Housing	PC/ABS and TPU
Optical face	PC


Cable

PUR

## **Technical Data**

Installation	Fixing screws , 2 x M2 allen head screws included with delivery
Mass	approx. 10 g
Cable length	200 mm

#### Connection




## **Connection Assignment**




Wire colors in accordance with EN 60947-5-2


1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

## **Assembly**



1	Operating display	green	
2	Signal display	yellow	
3	Emitter		
4	Receiver		



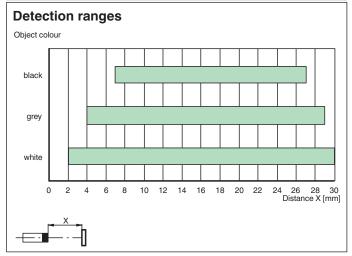

#### **Safety Information**



CLASS 1 LASER PRODUCT IEC 60825-1: 2007 certified. Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

#### CLASS 1 LASER PRODUCT IEC 60825-1: 2007 certified. Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

Laser Class 1 Information
The irradiation can lead to irritation especially in a dark environment. Do not point at people!
Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

					-		
744	C	-T-	 •	^	121	$\boldsymbol{a}$	-

6/	V31-WM-2M-PUR	Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey
	MH-R2-01	Mounting aid for R2 series, Mounting bracket
1370	MH-R2-02	Mounting aid for R2 series, Mounting bracket
	MH-R2-03	Mounting aid for R2 series, Mounting bracket
	MH-R2-04	Mounting aid for R2 series, Mounting bracket