


Laser triangulation sensor with background suppression, ultra-small design with M3 mounting, 30 mm sensing range, light on, PNP output, 200 mm fixed cable with plug M8, 4-pin



#### **Function**

The R3 series nano sensor has been developed for a broad range of applications. It offers excellent durability and is exceptionally easy to install. The housing is compact and, with its 45° cable outlet, can be installed in the smallest spaces. New functional principles and functionality open up a range of new options. The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

## Dimensions

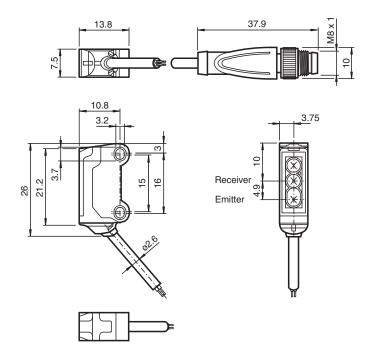

## **Technical Data**

General specifications	
Detection range	7 30 mm
Reference target	standard white, 100 mm x 100 mm
Light source	laser diode
Light type	modulated visible red light , 680 nm




Laser nominal ratings		
Note		LASER LIGHT , DO NOT STARE INTO BEAM
Laser class		1
Wave length		680 nm
Beam divergence		> 5 mrad
Pulse length		approx. 3 µs
Repetition rate		approx. 16.6 kHz
max. pulse energy		9.5 nJ
Black-white difference (6 %/90 %)		< 5 % at 30 mm
Diameter of the light spot		< 1 mm at a distance of 30 mm
Opening angle		approx. 2 °
Optical face		frontal
Ambient light limit		EN 60947-5-2 : 30000 Lux
Functional safety related parameters		EN 00947-3-2. 30000 Lux
MTTF <sub>d</sub>		800 a
Mission Time (T <sub>M</sub> )		20 a
		0%
Diagnostic Coverage (DC) Indicators/operating means		0 /0
Operation indicator		LED green, statically lit Power on , short-circuit : LED green flashing (approx. 4 Hz)
Function indicator		LED yellow: lights when object is detected
Electrical specifications		LED yellow. lights when object is detected
Operating voltage	U <sub>B</sub>	12 24 V
	-	< 10 mA
No-load supply current Protection class	I <sub>0</sub>	
Output		NO contact / light on
Switching type Signal output		NO contact / light-on 1 PNP output, short-circuit protected, reverse polarity protected, open collector
Switching voltage		max. 30 V DC
Switching current		max. 50 w DO
Voltage drop	U <sub>d</sub>	≤ 1.5 V DC
Switching frequency	f	approx. 2 kHz
Response time	1	250 μs
Conformity		230 μ8
Product standard		EN 60947-5-2
Laser safety		EN 60825-1:2007
Approvals and certificates		EN 00825-1.2007
		E87056 , cULus Recognized, Class 2 Power Source
UL approval		CCC approval / marking not required for products rated ≤36 V
CCC approval		IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations
FDA approval		pursuant to Laser Notice No. 50, dated June 24, 2007
Ambient conditions		
Ambient temperature		-20 60 °C (-4 140 °F)
Storage temperature		-30 70 °C (-22 158 °F)
Mechanical specifications		
Housing width		7.5 mm
Housing height		26 mm
Housing depth		13.8 mm
Degree of protection		IP67
Connection		200 mm fixed cable with 4-pin, M8x1 connector
Material		
Housing		PC/ABS and TPU
Optical face		PC
Cable		PUR

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

#### **Technical Data**

Mass	approx. 10 g
Cable length	200 mm

Connection




## **Connection Assignment**



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

# Assembly




1	Operating display	green
2	Signal display	yellow
3	Emitter	
4	Receiver	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

3


## **Characteristic Curve**

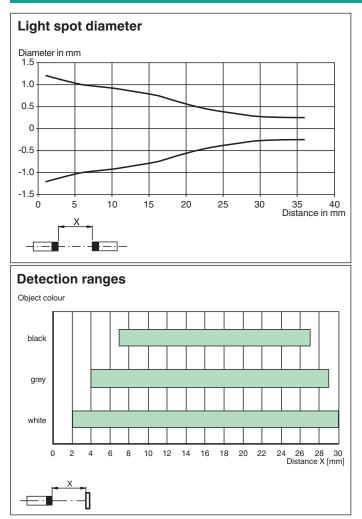

## **Safety Information**



LASER PRODUCT IEC 60825-1: 2007 certified. Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007



Release date: 2023-09-06 Date of issue: 2023-09-06 Filename: 70141888\_eng.pdf

4

## **Safety Information**

Laser Class 1 Information The irradiation can lead to irritation especially in a dark environment. Do not point at people! Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable. The warning accompanies the device and should be attached in immediate proximity to the device. Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

## Accessories

6/	V31-WM-2M-PUR	Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey
000 TH	MH-R3-01	Mounting aid for sensors from the R3 series, mounting bracket
() () () () () () () () () () () () () (	MH-R3-02	Mounting aid for sensors from the R3 series, mounting bracket
1, 0, 8 M	MH-R3-03	Mounting aid for sensors from the R3 series, mounting bracket
,	MH-R3-04	Mounting aid for sensors from the R3 series, mounting bracket

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

5