

# Retroreflective sensor OBR2000-R3-P1-0,2M-V3-P-L



- Ultra-small housing design
- DuraBeam Laser Sensors durable and employable like an LED
- 45° cable outlet for maximum mounting freedom under extremely tight space constraints


Laser retroreflective sensor, ultra-small design with M3 mounting, polarization filter, 2000 mm detection range, push-pull output, 200 mm fixed cable with plug M8, 3-pin



### **Function**


The nano sensor has been developed for a broad range of applications. It offers excellent durability and is exceptionally easy to install. The housing is compact and, with its 45° cable outlet, can be installed in the smallest spaces. New functional principles and functionality open up a

### **Dimensions**

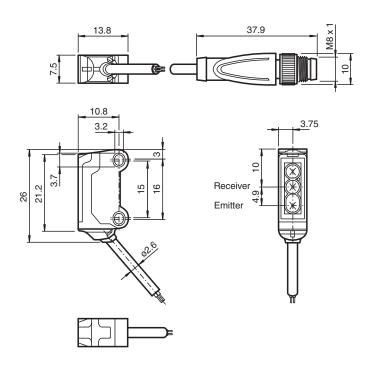

### **Technical Data**

General specifications	
Effective detection range	0 2 m
Reflector distance	40 2000 mm
Threshold detection range	2.3 m
Reference target	H40 reflector




Technical Data			
Light source		laser diode	
Light type		modulated visible red light , 680 nm	
Polarization filter		yes	
Laser nominal ratings		•	
Note		LASER LIGHT , DO NOT STARE INTO BEAM	
Laser class		1	
Wave length		680 nm	
Beam divergence		> 5 mrad	
Pulse length		approx. 3 µs	
Repetition rate		approx. 16.6 kHz	
max. pulse energy		8 nJ	
Diameter of the light spot		approx. 35 mm at a distance of 2000 mm	
Opening angle		approx. 0.5 °	
Optical face		frontal	
Ambient light limit		EN 60947-5-2 : 30000 Lux	
Functional safety related parameters			
MTTF <sub>d</sub>		800 a	
Mission Time (T <sub>M</sub> )		20 a	
Diagnostic Coverage (DC)		0 %	
Indicators/operating means			
Operation indicator		LED green, statically lit Power on , short-circuit : LED green flashing (approx. 4 Hz)	
Function indicator		LED yellow: lights up when receiving the light beam; flashes when falling short of the operating reserve; OFF when light beam is interrupted	
Electrical specifications			
Operating voltage	U <sub>B</sub>	12 24 V	
No-load supply current	I <sub>0</sub>	< 10 mA	
Protection class		III	
Output			
Switching type		The default setting is: PNP normally-open/dark-on; NPN normally-closed/light-on	
Signal output		Push-pull output, short-circuit protected, reverse polarity protected	
Switching voltage		max. 30 V DC	
Switching current		max. 50 mA , resistive load	
Voltage drop	U <sub>d</sub>	≤ 1.5 V DC	
Switching frequency	f	approx. 2 kHz	
Response time		250 μs	
Conformity			
Product standard		EN 60947-5-2	
Laser safety		EN 60825-1:2007	
Approvals and certificates			
UL approval		E87056, cULus Recognized, Class 2 Power Source	
CCC approval		CCC approval / marking not required for products rated ≤36 V	
FDA approval		IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007	
Ambient conditions			
Ambient temperature		-20 60 °C (-4 140 °F)	
Storage temperature		-30 70 °C (-22 158 °F)	
Mechanical specifications			
Housing width		7.5 mm	
Housing height		26 mm	
Housing depth		13.8 mm	
Degree of protection		IP67	
Connection		200 mm fixed cable with 3-pin, M8 x 1 connector	
Material			
Housing		PC/ABS and TPU	

## **Technical Data**

Optical face	PMMA
Cable	PUR
Mass	approx. 10 g
Cable length	200 mm

## **Connection**




## **Connection Assignment**




Wire colors in accordance with EN 60947-5-2

1 3 4 BN (brown) BU (blue) BK (black)

## **Assembly**




1	Operating display	green
2	Signal display	yellow
3	Emitter	
4	Receiver	

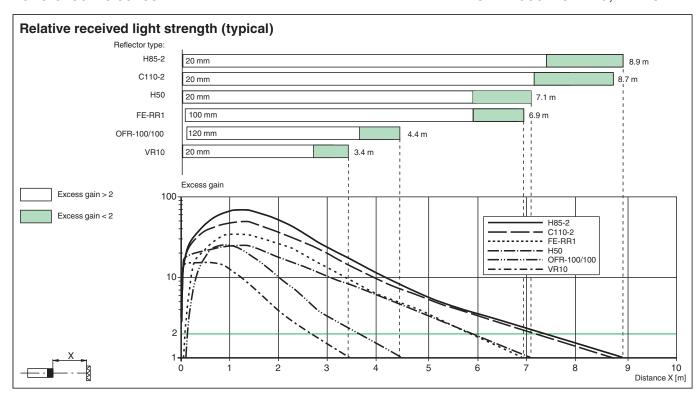

## **Safety Information**



## CLASS 1 LASER PRODUCT IEC 60825-1: 2007 certified. Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007



## **Safety Information**

#### **Laser Class 1 Information**

The irradiation can lead to irritation especially in a dark environment. Do not point at people! Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Accessories					
, , , , , ,	MH-R3-01	Mounting aid for sensors from the R3 series, mounting bracket			
ंःश	MH-R3-02	Mounting aid for sensors from the R3 series, mounting bracket			
	MH-R3-03	Mounting aid for sensors from the R3 series, mounting bracket			
	MH-R3-04	Mounting aid for sensors from the R3 series, mounting bracket			
8	REF-H40	Reflector, rectangular 47.5 mm x 23.5 mm, mounting holes, fixing strap			
	REF-H23	Reflector with mounting holes			
	REF-MH20	Reflector with Micro-structure, rectangular 32 mm x 20 mm, mounting holes			
	REF-MH23	Reflector with Micro-structure, rectangular 23 mm x 13.8 mm, diagonal mounting hole			
6/	V3-GM-2M-PUR	Female cordset single-ended M8 straight A-coded, 3-pin, PUR cable grey			
61	V3-WM-2M-PUR	Female cordset single-ended M8 angled A-coded, 3-pin, PUR cable grey			