



# Terminal Block with Test Plug Socket KF-CTT-5GN


- 3-pin spring terminal with push-in connection technology
- For KF modules of K-System
- Integrated test sockets for connection of HART communicators
- Packaging unit: 5 pieces green

Terminal block for KF modules, 3-pin spring terminal, with test sockets, green

## Function

The terminal block is suitable for KSystem applications.  
 The green terminal block is used for connection of field signals as well as the connection of control signals.  
 This terminal block has integrated test sockets for connection of HART communicators.  
 The terminal block can be coded with the provided coding pins KF-CP.

## Dimensions

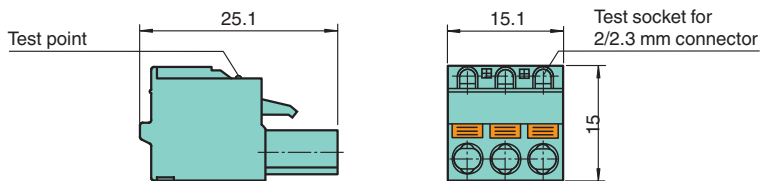

## Technical Data

<b>General specifications</b>	
Number of pins	3
<b>Mechanical specifications</b>	
Core cross section	max. 2.5 mm <sup>2</sup>
Material	
Color	green
Mass	approx. 5 g
Dimensions	15.1 x 15 x 25.1 mm (0.6 x 0.6 x 1 inch)
Construction type	spring terminal with integrated test sockets , removable
Structure	one-rowed
<b>General information</b>	
Packing unit	5 item(s)

Release date: 2023-05-31 Date of issue: 2023-05-31 Filename: 215341\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

## Safety Information

The insulation of the removable terminal blocks protect against direct contact. The insulation conforms to a reinforced insulation acc. to EN 50178 with a rated insulation voltage of 50 V AC.

If the rated voltage greater than 50 V AC, proceed as follows:

- Switch off the voltage.
- Connect the terminal blocks or disconnect the terminal blocks.