

# Terminal Block with Test Plug Socket KF-STP-5BU


- 3-pin screw terminal
- For KF modules of K-System
- Integrated test sockets for connection of HART communicators
- Packaging unit: 5 pieces blue

Terminal block for KF modules, 3-pin screw terminal, with test sockets, blue

## Function

The terminal block is suitable for KSystem applications.  
 The blue terminal block is used for connection of signals from or in the hazardous area.  
 This terminal block has integrated test sockets for connection of HART communicators.  
 The terminal block can be coded with the provided coding pins KF-CP.

## Dimensions

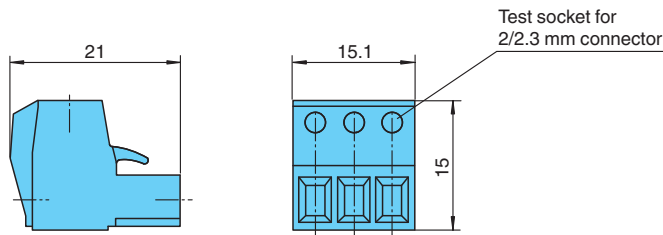

## Technical Data

### General specifications

Number of pins 3

### Mechanical specifications

Core cross section max. 2.5 mm<sup>2</sup>

Material

Color blue

Mass approx. 5 g

Dimensions 15.1 x 15 x 21 mm (0.6 x 0.6 x 0.83 inch)

Construction type screw terminal with integrated test sockets , removable

Structure one-rowed

### General information

Packing unit 5 item(s)

Release date: 2023-05-31 Date of issue: 2023-05-31 Filename: 215363\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

## Safety Information

The insulation of the removable terminal blocks protect against direct contact. The insulation conforms to a reinforced insulation acc. to EN 50178 with a rated insulation voltage of 50 V AC.

If the rated voltage greater than 50 V AC, proceed as follows:

- Switch off the voltage.
- Connect the terminal blocks or disconnect the terminal blocks.