


Connection cable, Ethernet V19SX-G-GN5M-PUR-ABG-V45-G

- Industrial Ethernet
- Hard-wearing PUR cable
- Cat 7 cable
- UL listed for USA and Canada
- Halogen-free
- Screw connection suitable for tool assembly
- Immunity to vibration, with mechanical latching

Ethernet bus cable M12 plug straight X-coded to RJ45 plug straight Ethernet-coded, 8-pin, PUR cable green, Cat6A, pairs shielded and overall shield



Dimensions

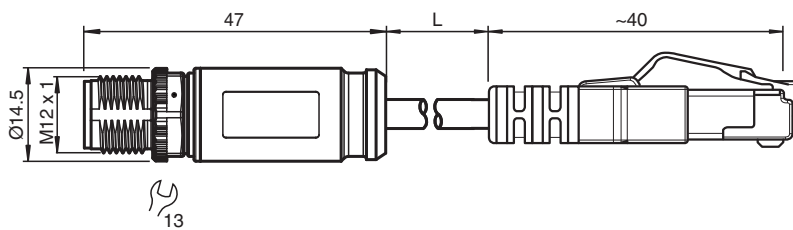

Technical Data

General specifications

Connector 1	
Connection	plug
Construction type	M12
Style	straight
Locking	screw connection
Number of pins	8
Coding	X-coded
Connector 2	
Connection	plug
Construction type	RJ45
Style	straight
Locking	snap locking
Number of pins	8
UL File Number	E520112

Electrical specifications

Release date: 2023-05-02 Date of issue: 2023-05-02 Filename: 70115004_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data

Operating voltage	U _B	max. 50 V AC / 60 V DC
Operating current	I _B	max. 0.5 A
Conformity		
Degree of protection		EN 60529
Fieldbus standard		EIA/TIA 568 B
Plug connection		connector M12 x 1 : IEC 61076-2-109 connector RJ45 : IEC 60603-7
Component category		CAT6A (IEC 11801, EN 50173)
Flammability		IEC 60332-1-2 , UL 1581
Ambient conditions		
Ambient temperature		
Cable, fixed		-40 ... 85 °C (-40 ... 185 °F)
Cable, flexing		-10 ... 60 °C (14 ... 140 °F)
Pollution degree		3
Mechanical specifications		
Connector 1		
Tightening torque		0.6 Nm
Tool installation		straight knurling , hexagon nut SW = 13 mm
Mating cycles		min. 100
Shielding		shield connected to screw connection
Degree of protection		IP67
Connector 2		
Loosening protection		available
Mating cycles		min. 750
Shielding		shield connected to connector
Degree of protection		IP20
Cable		
according to IEC/EN 60228 (DIN VDE 0295) class 5		
Sheath diameter		6.2 mm
Bending radius		max. 50 mm active max. 25 mm fixed
Sheath color		green (similar to RAL 6018)
Number of cores		8
Core cross section		0.14 mm ²
Cores color		Core 1: white/orange Core 2: orange Core 3: white/green Core 4: green Core 5: white/brown Core 6: brown Core 7: white/blue Core 8: blue
Core construction		7 x 0.404 mm Ø twisted pairs , twisted pair shield
Shield		tinned copper braiding twisted pair shield : aluminum-lined polyester foil
Length	L	5 m
Cable code		Li 02YSC 11Y 4 x 2 x 0,14 (AWG26/7)
Material		
Connector 1		
Screw connection		Zinc diecast, nickel-plated
Body		TPU, black
Contact surface		Ni/Au
Flammability		V-2
Connector 2		
Body		PC
Contact surface		Ni/Au
Flammability		V-0
Cable		

Release date: 2023-05-02 Date of issue: 2023-05-02 Filename: 70115004_eng.pdf

Technical Data

Sheathing	PUR
Core insulation	PE
Flammability	FT1

Connection Assignment

